

A




B

C

D

E

F

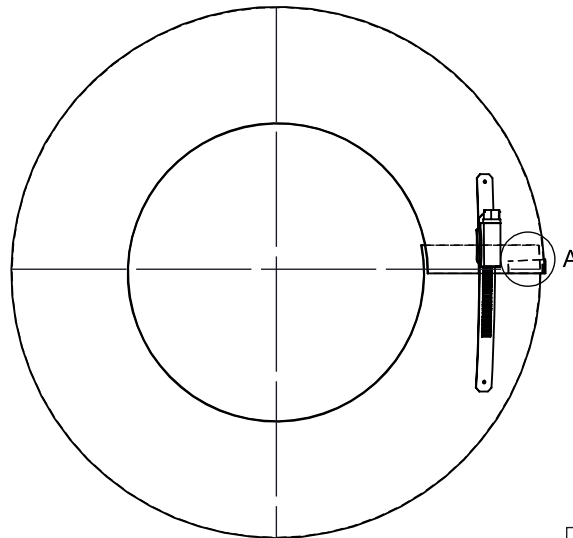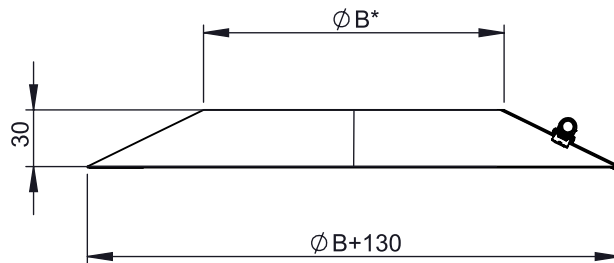


A (1 : 2)

Beispiel für mögliche Materiallösungen	
WGR	MAT
2R2	1.4301(304)-2R(IIID)
2B2	1.4301(304)-2B(IIIC)
2J2	1.4301(304)-2J(GEB)FO
CU	2.0090(SFCU)

*Durchmesser B ist verstellbar,
dadurch kann der Wetterkragen
am Klemmband montiert werden
(Typ ZUAC41)

M 1:6 (Ø150)

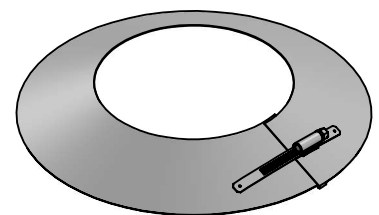

Ø												80				100	110	115	120	
B												130				150	160	165	170	
kg						0,4					0,5									
Ø	130		140		150		160			180					200					
B	180		190		200		210			230					250					
kg	0,5		0,6					0,7												
Ø	225				250										300				350	
B	275				300										350				400	
kg	0,7		0,8					0,9					1,0							
Ø		400			450		500			550			600							
B		450			500		550			600			650							
kg		1,1		1,2		1,3		1,4		1,5										

notes:	DIN ISO 13920 Tolerances B			 CHIMNEY SYSTEMS		scale
	revisions-no.	A2	mm / kg			1:4
		date	name	description Wetterkragen / Wandrosette passend für Isolierstärke 25mm		format
	drawn by	15.05.2019	SME			A4
	checked by					sheet
	approved by					1 of 1
	modified by	06.08.2025	MNA	code	DWECO31	
				drawing-no.	01-07-04-5450-000	