

A


B

C


D

E

F

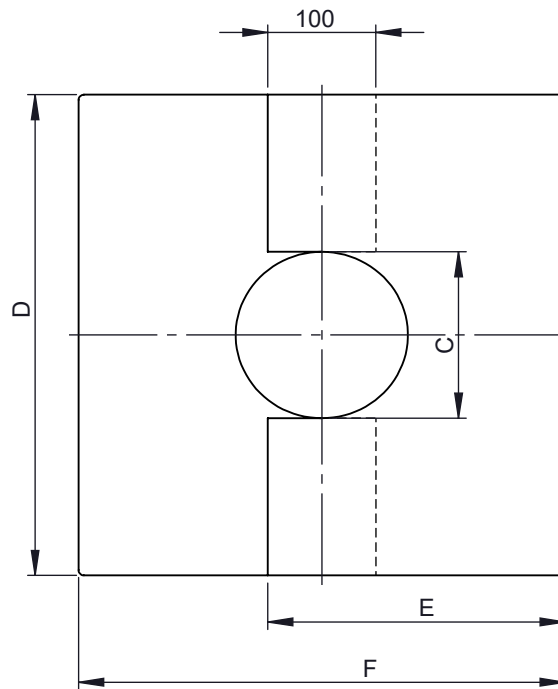

M 1:9 (Ø150)

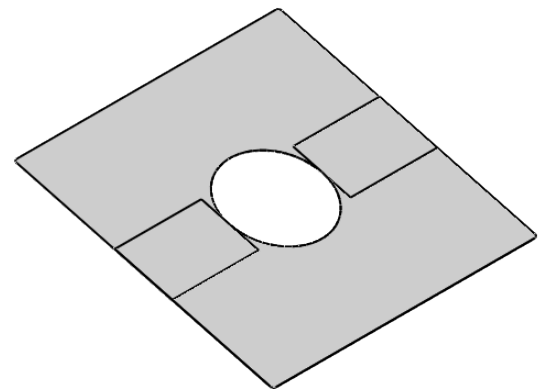

Ø	80	100	110	115	120	125	130	140	145	150	160	165	170	180	190	200	210	215	225	230
C	83	103	113	118	123	128	133	143	148	154	163	168	173	183	193	203	213	218	228	233
D	375	395	405	410	415	420	425	435	440	445	455	460	465	475	485	495	505	510	520	525
E	239	249	254	257	260	262	265	270	273	275	280	283	285	291	296	301	306	309	314	317
F	378	399	409	414	419	424	430	440	445	450	461	466	471	481	492	502	512	518	528	533
kg	0,78	0,84	0,87	0,89	0,9	0,92	0,94	0,97	0,98	1	1,03	1,05	1,06	1,09	1,13	1,16	1,19	1,21	1,24	1,26

Ø	245	250	265	300	315	350	365	400	415	450	465	500	515	550	565	600	615	650	665
C	248	253	268	303	318	353	368	403	418	453	468	503	518	553	568	603	618	653	668
D	540	545	560	595	610	645	660	695	710	745	760	795	810	845	860	895	910	945	960
E	324	327	335	353	361	379	386	405	412	430	438	456	464	482	490	508	516	534	542
F	549	554	569	606	621	657	673	709	725	761	776	813	828	864	880	916	932	968	983
kg	1,31	1,32	1,37	1,49	1,54	1,67	1,72	1,85	1,9	2,03	2,09	2,23	2,28	2,42	2,48	2,62	2,69	2,83	2,89

notes: ENCD	DIN ISO 13920 Tolerances B			 CHIMNEY SYSTEMS	scale
	revisions-no.	00	mm / kg		1:10
		date	name		format
	drawn by	08.09.2025	AJA		A4
	checked by	08.09.2025	PMA		sheet
	approved by	08.09.2025	BBR		1 of 1
	modified by				
				description	Flat ceiling plate 0-30° two-piece
				code	2R2-ZUAC99V Ø
				drawing-no.	07-01-5491-000