

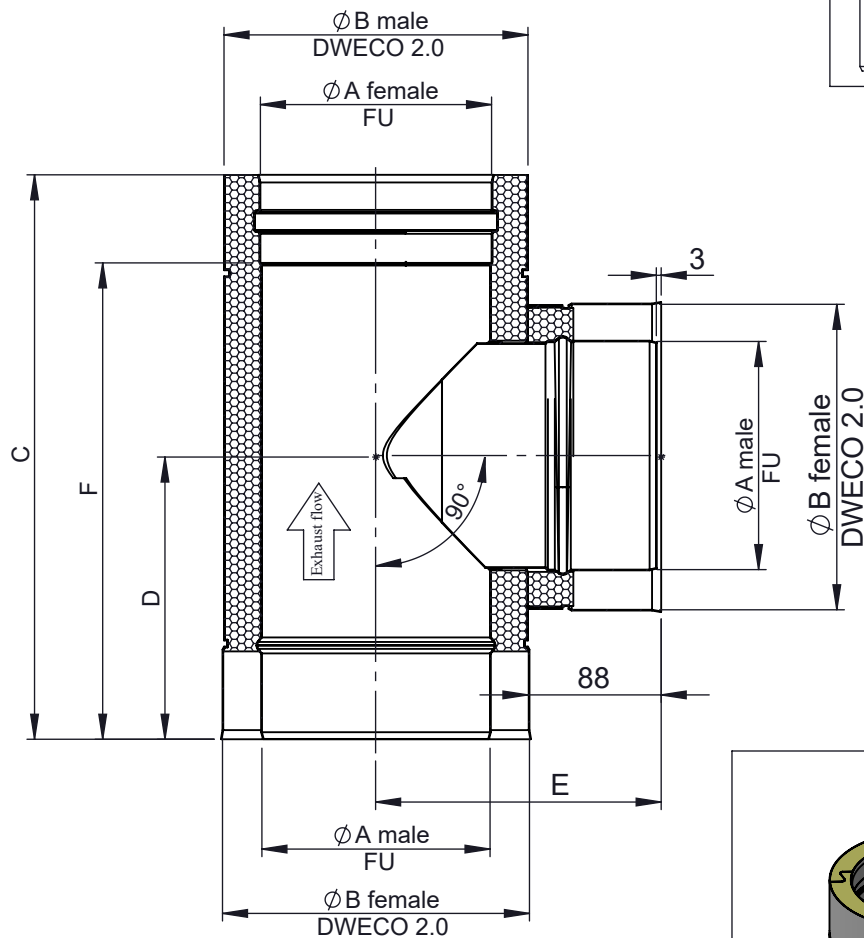


A  
B  
C  
D  
E  
F

Possible type of female part "FU"

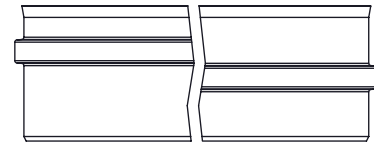

M 1:8 (Ø 150)

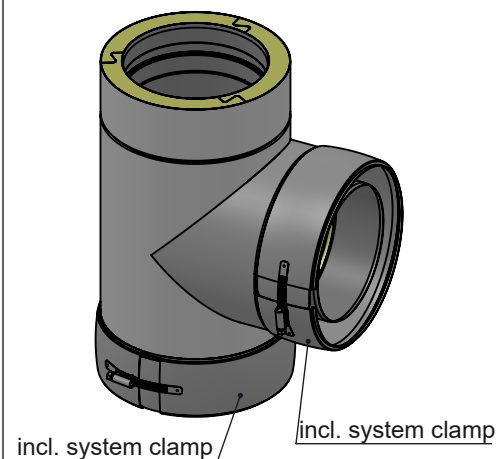

| Ø  | 130   | 150   | 160   | 180   | 200   | 250   |
|----|-------|-------|-------|-------|-------|-------|
| A  | 130   | 150   | 160   | 180   | 200   | 250   |
| B  | 180   | 200   | 210   | 230   | 250   | 300   |
| C  | 353   | 373   | 383   | 403   | 423   | 473   |
| D  | 177,5 | 187,5 | 191,5 | 202,5 | 212,5 | 237,5 |
| E  | 179   | 189   | 194   | 204   | 214   | 239   |
| F  | 295   | 315   | 325   | 345   | 365   | 416   |
| kg | 2,6   | 3,1   | 3,3   | 3,8   | 4,3   | 4,9   |

notes:  
ENCD

DIN ISO 13920 Tolerances B

revisions-no.

02

mm / kg

|             | date     | name |
|-------------|----------|------|
| drawn by    | 26.10.23 | KOS  |
| checked by  | 26.10.23 | JAD  |
| approved by | 26.10.23 | JWY  |
| modified by | 19.11.24 | KOS  |

**Jeremias**  
CHIMNEY SYSTEMS

description  
90° Tee with condensate drain edge, incl. locking band, DWI and DWA extruded

code  
**290-DWETN 2866 Ø**

drawing-no.  
**01-02-35-2100-290**

scale  
1:5

format  
A4

sheet  
1 of 1

