



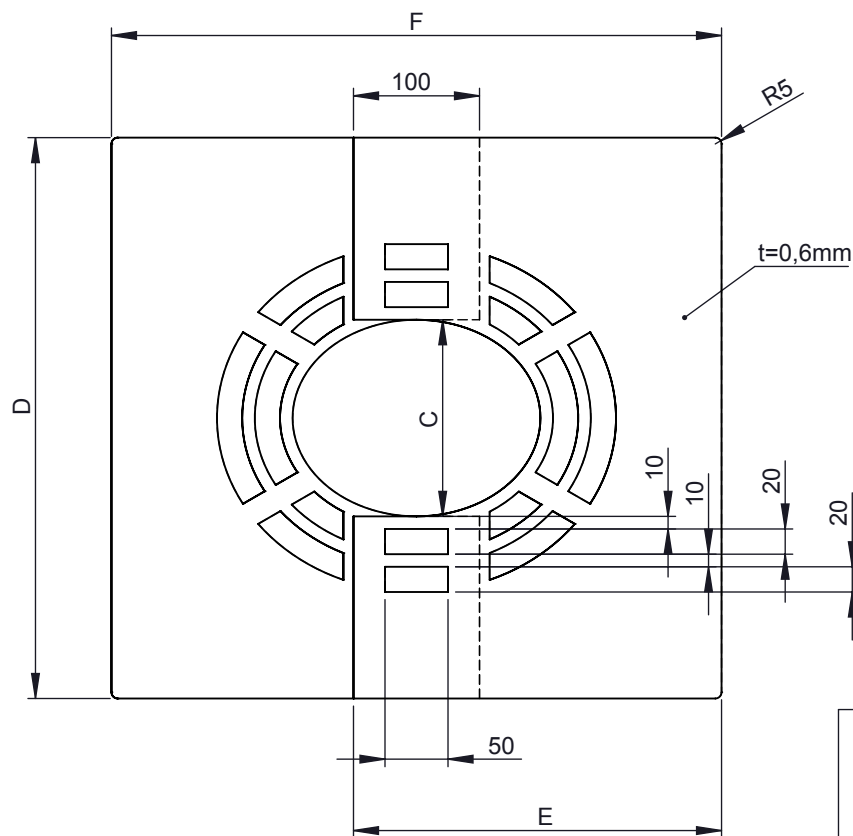

M 1:10 (Ø150)

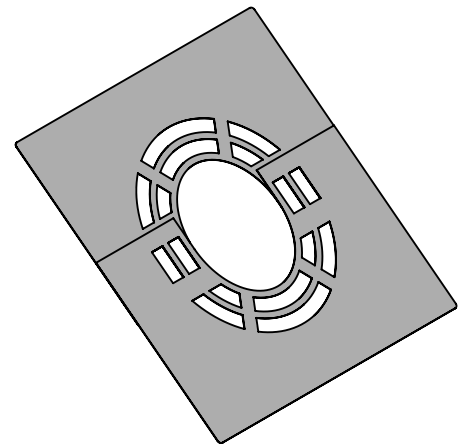

Ø	125	130	145	150	165	170	180	185	195	200	205	210	215	225	230	245	250	265	
C	131	136	151	156	171	176	186	191	201	206	211	216	221	231	236	251	256	271	
D	420	425	440	445	460	465	475	480	490	495	500	505	510	520	525	540	545	560	
E	276	279	289	292	301	305	311	314	320	324	327	330	333	339	342	352	355	365	
F	453	459	478	484	503	509	522	528	541	547	553	560	566	579	585	604	610	629	
kg	0,9				1					1,1					1,2			1,3	
Ø	280	290	295	300	315	350	365	400	415	450	465	500	515	550	565	600	615	650	665
C	286	296	301	306	321	356	371	406	421	456	471	506	521	556	571	606	621	656	671
D	575	585	590	595	610	645	660	695	710	745	760	795	810	845	860	895	910	945	960
E	374	380	383	387	396	418	428	450	459	481	491	513	522	544	554	576	585	607	617
F	648	661	667	673	692	736	755	799	818	862	881	925	944	988	1007	1051	1070	1114	1133
kg	1,3		1,4			1,5	1,6	1,7	1,8	1,9	1,9	2,1	2,1	2,3	2,3	2,5	2,5	2,7	2,7

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A1

mm / kg

date

16.10.2018

name

TDO

checked by

approved by

modified by

description

Jeremias[®]
CHIMNEY SYSTEMS

Deckenblende für Hinterlüftung
zweiteilig, 31-45°

code

ZUDA98VHL

drawing-no.

01-07-04-5524-000

scale

1:6

format

A4

sheet

1 of 1

