

A


B

C

D

E


F

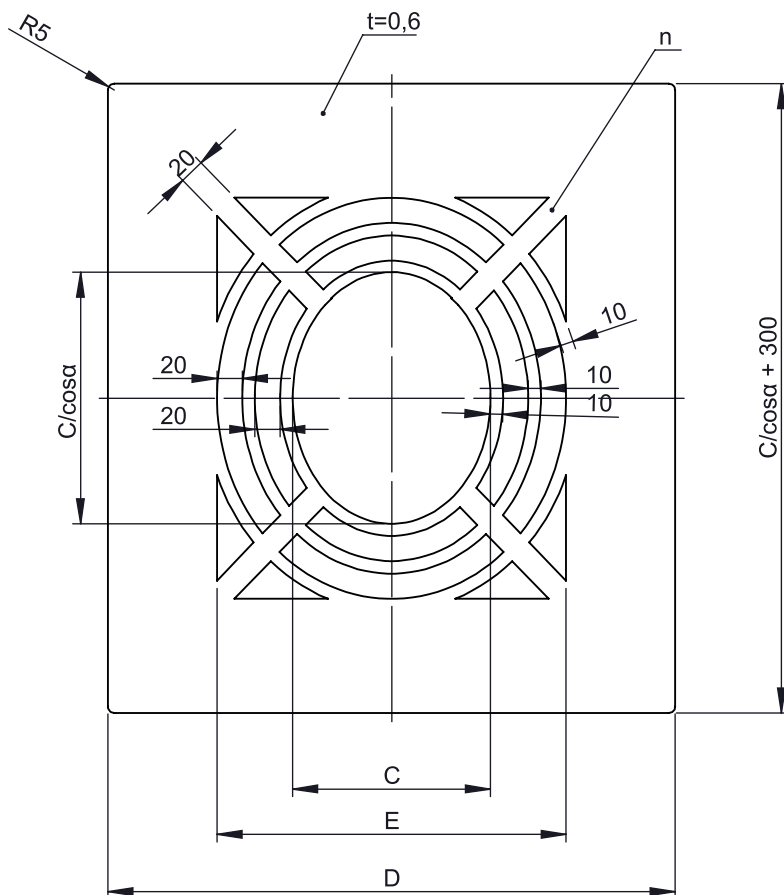

α = Gradzahl der Dachneigung

Bitte die Gradzahl bei der Bestellung mit angeben

M 1:10 (Ø150)

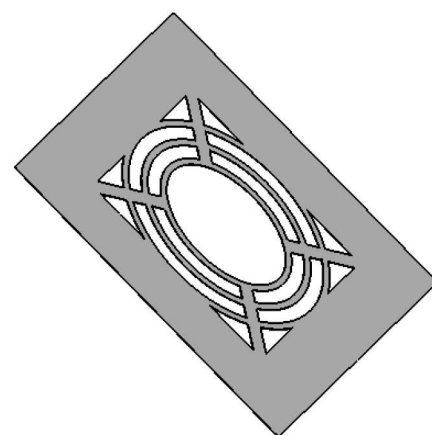

Ø				80		100	110	115	120	125	130		140		150		160		
C				131		151	157	166	171	176	181		191		201		211		
D				425		445	450	460	465	470	475		485		495		505		
E				251		271	277	286	291	296	301		311		321		331		
n	4							6											
kg				0,71		0,76	0,78	0,81	0,82	0,83	0,84		0,87		0,89		0,92		
Ø		180				200					225					250			
C		231				251					281					306			
D		525				545					575					600			
E		351				371					401					426			
n	6							8											
kg		0,97				1,02					1,1					1,16			
Ø		300		350		400		450		500		550		600			715		
C		356		406		456		506		556		606		656					
D		650		700		750		800		850		900		950					
E		476		526		576		626		676		726		776					
n	8																		
kg		1,28		1,41		1,53		1,66		1,78		1,9		2,03					

notes:

DIN ISO 13920 Tolerances B

revisions-no.

A2

mm / kg

date

name

drawn by

25.02.2021

TRA

checked by

approved by

modified by

17.11.2025

AST

Jeremias
CHIMNEY SYSTEMS

description Deckenblende für Hinterlüftung,
einteilig 1 - 65°
passend für Isolierstärke 25mm

code

DWECO71HL

drawing-no.

scale

1:6

format

A4

sheet

1 of 1

