





Ausführungsvarianten für Muffe Innenrohr

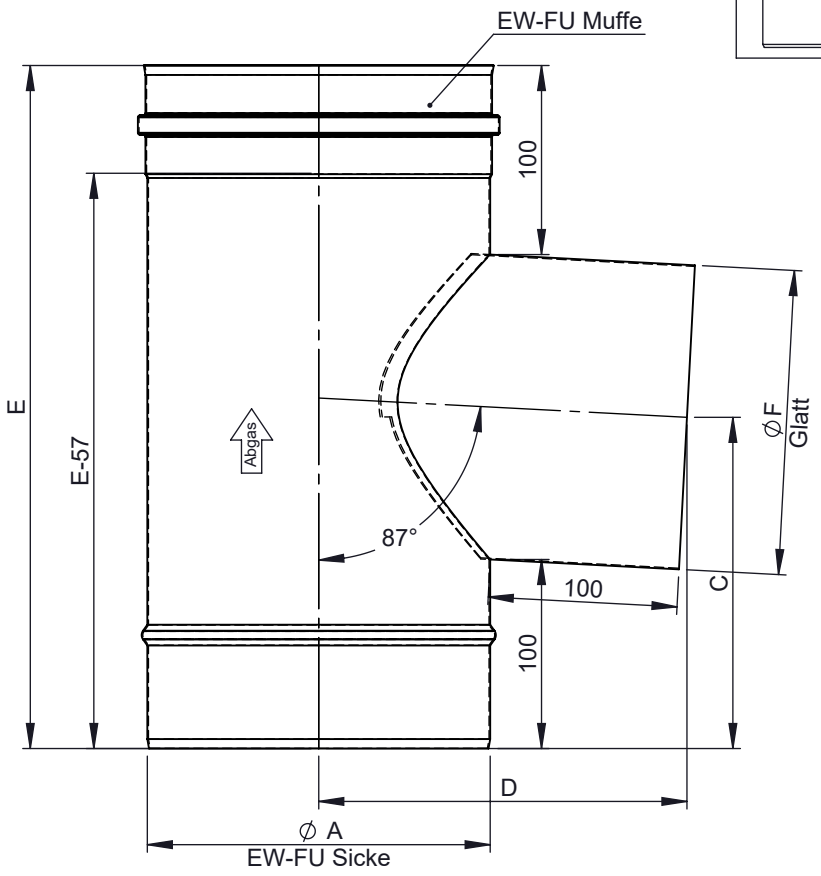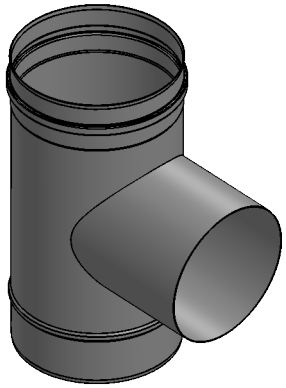



M 1:8 (Ø180/160)



Code	FU3015RØ	FU3015RMØ	FU3015RSØ
Variante	 Glatt / Bez końcówki / Without end	 M = Muffe / Mufa / Female EW-FU	 S = Sicke / Zyka / Male EW-FU

Ø	180/60	180/80	180/100	180/110	180/115	180/120	180/125	180/130	180/140	180/150	180/160
A	180										
C	125	135	145	150	153	155	158	160	165	171	175
D	192	193			194					195	
E	260	281	301	311	316	321	326	331	341	352	361
F	60	80	100	110	115	120	125	130	140	150	160
kg	0,82	0,9	0,98	1,02	1,04	1,06	1,08	1,1	1,14	1,18	1,22

notes:

DIN ISO 13920 Tolerances B

revisions-no. A2 | mm / kg

	date	name
drawn by	09.07.2018	KAB
checked by		
approved by		
modified by	24.03.2022	KSA

jeremias® CHIMNEY SYSTEMS

description: T-Anschluss 87° Ø180mm (handgeschweißt) mit reduziertem Abgang glatt / FU-Muffe / Sicke

code: **FU063015R180 / FU063015RM180 / FU063015RS180**

drawing-no.: **01-01-20-2114-000**

scale: 1:4

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.