
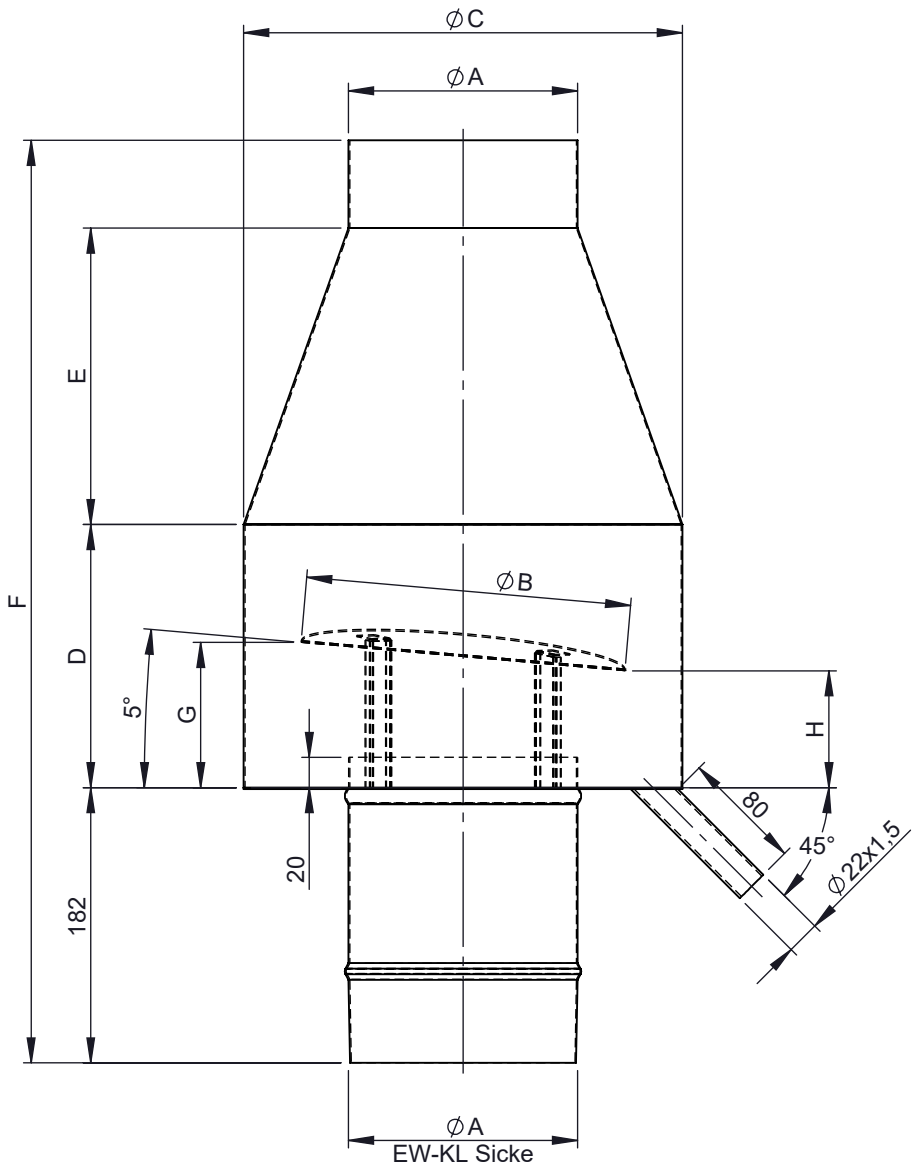


M 1:10 (Ø150)

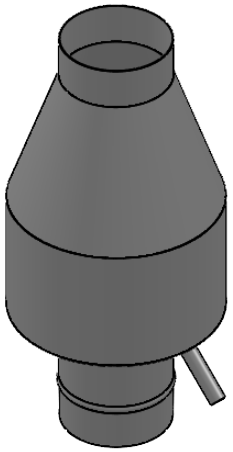

Ø	80	100	130	150	180	200	225	250	300	350	400	450	500	600
A	80	100	130	150	180	200	225	250	300	350	400	450	500	600
B	145	165	195	215	245	265	290	315	365	415	465	515	565	665
C	220	240	270	290	340	360	385	430	500	570	640	710	780	920
D	139	149	164	174	189	199	212	224	249	274	299	324	349	399
E	196	196	196	196	224	224	237	251	279	306	334	361	389	444
F	578	588	600	610	652	662	689	715	767	820	872	925	977	1082
G	74	80	90	96	104	110	113	125	140	154	169	184	198	228
H	61	66	73	77	83	87	88	98	108	118	128	139	149	170
kg	2,2	2,56	3,13	3,54	4,52	4,98	5,95	7,01	8,97	11,16	14,52	17,33	20,38	27,18

notes:

DIN ISO 13920 Tolerances B

revisions-no. A | mm / kg

	date	name
drawn by	29.05.2026	SSE
checked by		
approved by		
modified by		

jeremias CHIMNEY SYSTEMS

description: Deflektorhaube (bis 250°C sowie max.15m/s Abgasgeschwindigkeit)

code: **KL061023**

drawing-no.: **01-10-5060-000**

scale: 1:5

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.