

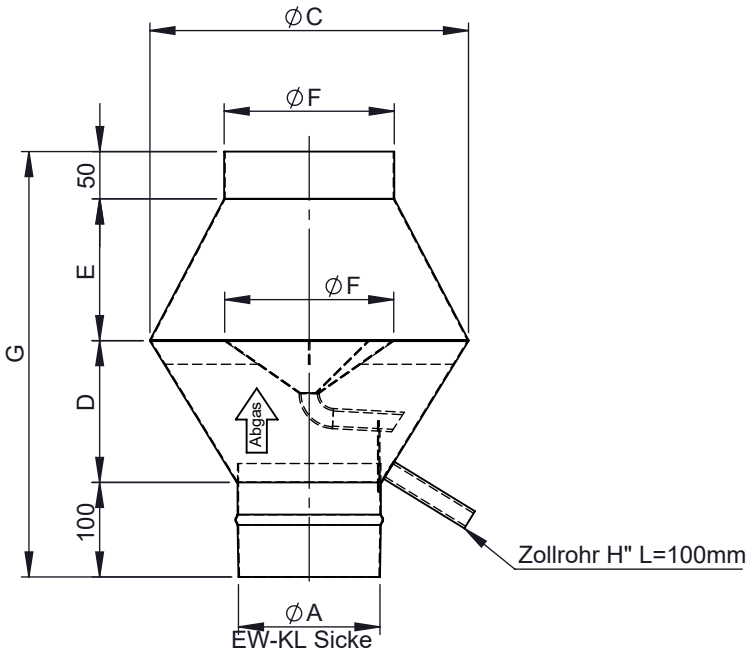


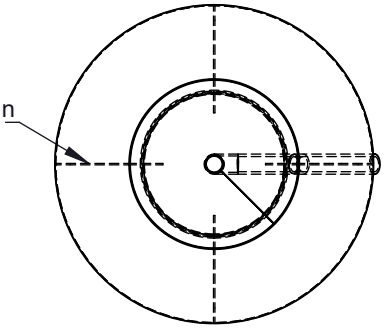

M 1:10 (Ø200)

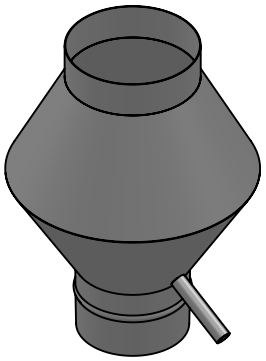

Ø	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
C	180	225	248	259	270	292	315	338	360	405	450	506	562	675	788	900	1012	1125	1238	1350
D	80	100	110	115	120	130	140	150	128	144	160	180	200	240	280	320	360	400	440	480
E	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
F	96	120	132	138	144	156	168	180	192	216	240	270	300	360	420	480	540	600	660	720
G	310	350	370	380	390	410	430	450	438	474	510	555	600	690	780	870	960	1050	1140	1230
H	1/2"													3/4"						
n	4											6				8				
kg	1,4	1,9	2,2	2,4	2,6	2,9	3,3	3,7	4	4,9	5,9	7,3	8,8	12,3	16,7	21,2	26,4	32,1	38,4	45,3

notes:

DIN ISO 13920 Tolerances B

revisions-no. A2 | mm / kg

	date	name
drawn by	14.05.2019	NGR
checked by		
approved by		
modified by	17.05.2019	NGR

jeremias® CHIMNEY SYSTEMS

description: Deflektorhaube (max. 35m/s Abgasgeschwindigkeit)

code: **KL061023HT**

drawing-no.

scale: 1:8

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.