
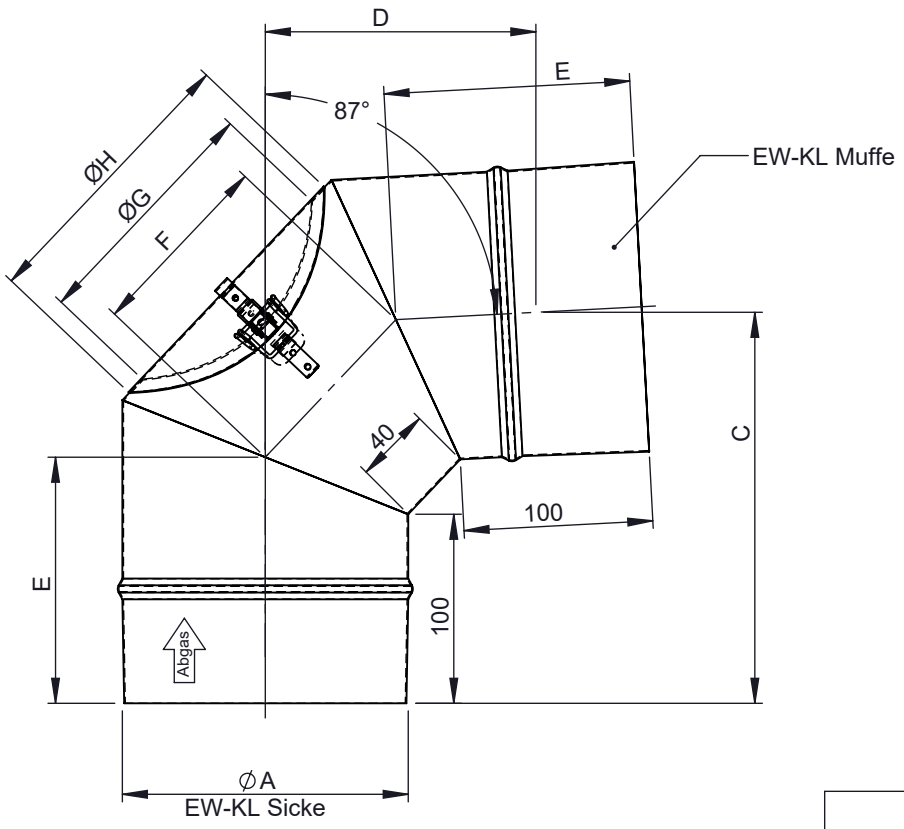


M 1:5(Ø150)

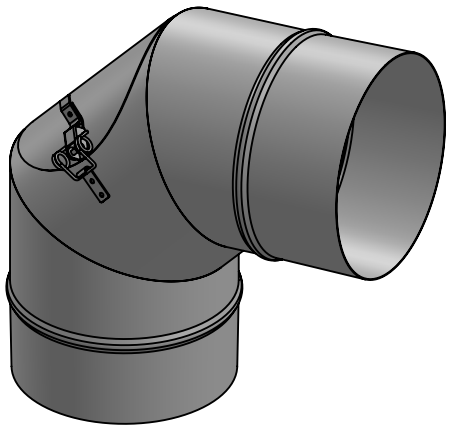

Ø	080	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
C	171	181	186	189	191	196	201	207	211	221	231	244	256	281	306	331	356	381	406	431
D	109	119	124	126	128	133	138	143	147	157	166	178	190	214	237	261	285	308	332	356
E	116	120	122	123	124	126	128	130	132	136	140	145	150	160	170	180	190	200	210	220
F	72	80	84	86	88	92	96	100	104	112	120	130	140	160	180	199	220	239	259	279
ØG	80	100						130		150		180			200	250				
ØH	100	115	120					150		170		200			220	270				
ti	0,6														0,8					
WGR	27														236					
kg	0,46	0,52	0,58	0,61	0,65	0,71	0,78	0,87	0,93	1,09	1,25	1,48	2,11	2,23	3,72	4,58	5,51	6,51	7,59	8,75

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1 | mm / kg

	date	name
drawn by	15.02.2024	DFO
checked by		
approved by		
modified by		

description: Winkel 87° mit Revision (bis 600°C/N1), runde Öffnung

code: **KL0614**

drawing-no.: **01-01-10-6503-000**

scale: 1:4

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.