
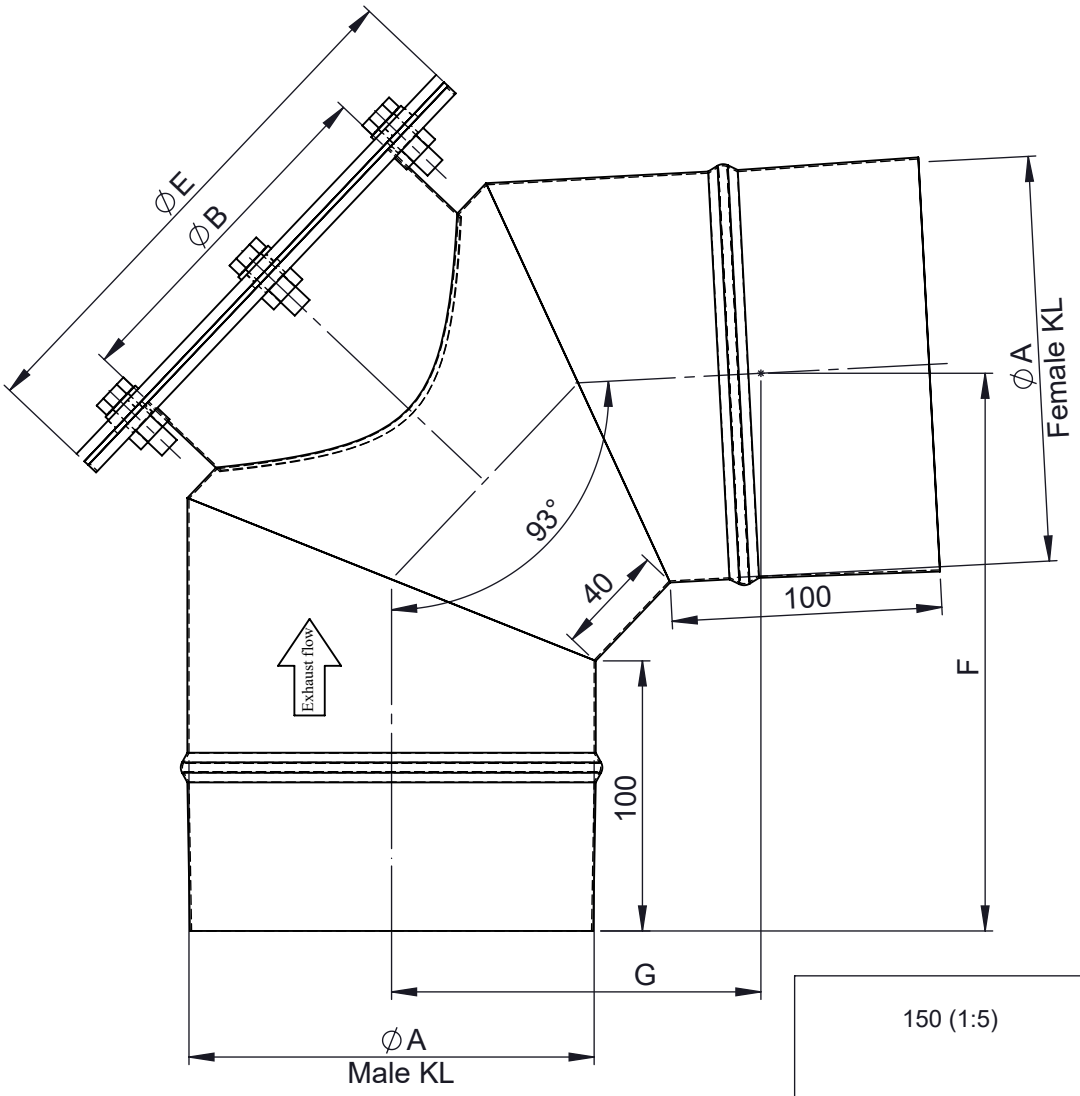


150 (1:5)

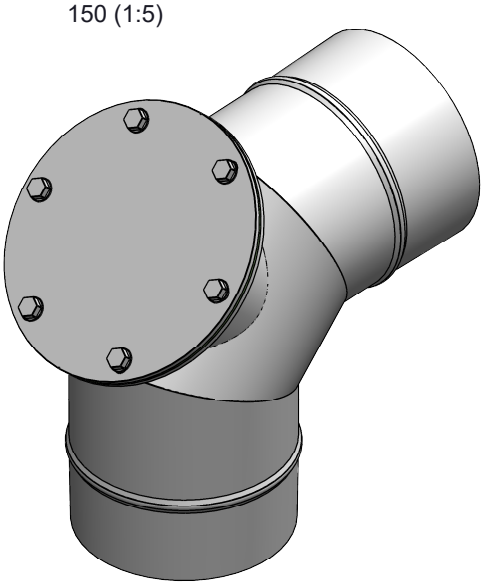

∅	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
B	80	100				130			150			180			200	250				
E	143,5	163,5				193,5			213,5			243,5			263,5	313,5				
F	171	181	186	189	191	196	201	207	211	222	231	244	256	281	306	331	356	381	406	431
G	110	120	125	127	129	134	139	144	148	158	167	179	191	215	238	262	286	309	333	357
kg	0,76	0,94	1,01	1,04	1,07	1,23	1,3	1,38	1,51	1,67	1,83	2,14	2,38	2,9	4,47	5,45	6,4	7,42	8,53	9,72

notes:
ENCD

DIN ISO 13920 Tolerances B

revisions-no. 02

mm / kg

	date	name
drawn by	31.05.23	PMA
checked by	31.05.23	JAD
approved by	31.05.23	JWY
modified by		

jeremias® CHIMNEY SYSTEMS

description: Elbow 93° with inspection opening (251-600°C/H1), round door.

code: **KL0623HTD∅**

drawing-no.: **01-10-6504-000**

scale: 1:10

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.