
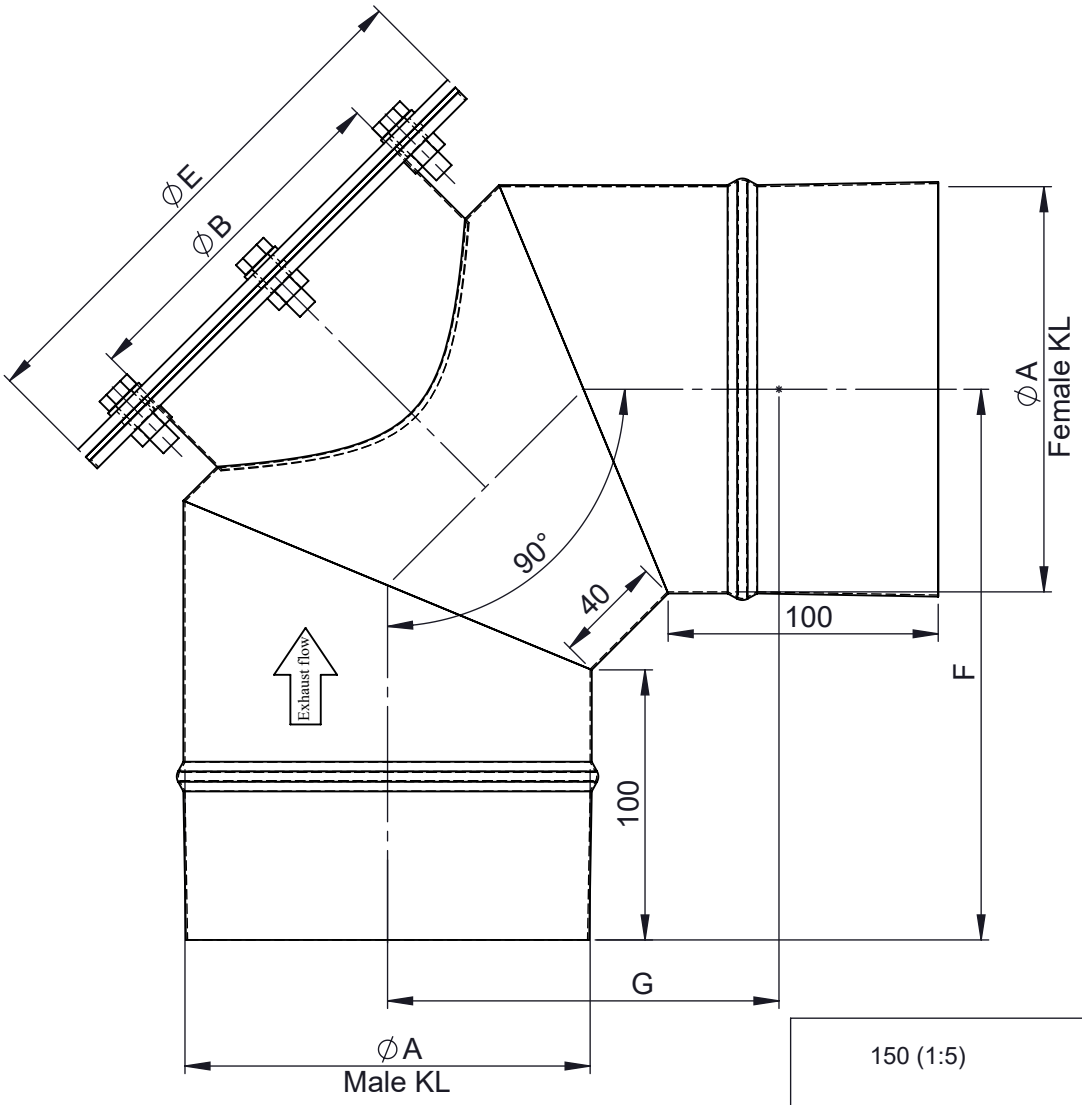


150 (1:5)

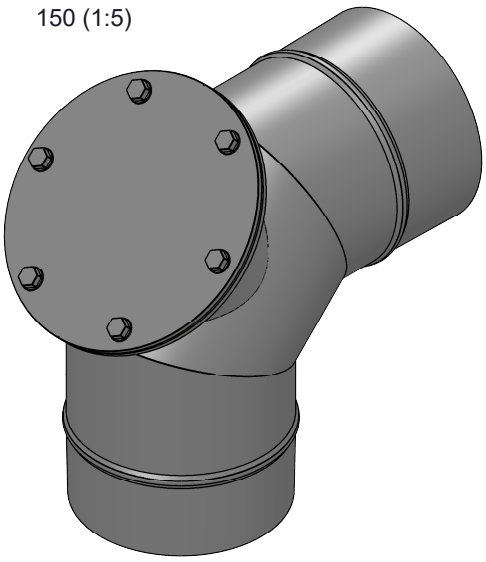

∅	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
B	80	100				130			150			180			200	250				
E	143,5	163,5				193,5			213,5			243,5			263,5	313,5				
F	168	178	183	186	188	193	198	204	208	219	228	241	253	278	303	328	353	378	403	428
G	113	123	128	131	133	138	143	149	153	164	173	186	198	223	248	273	298	323	348	373
kg	0,76	0,94	1,01	1,04	1,07	1,23	1,3	1,38	1,51	1,67	1,83	2,14	2,38	2,9	4,47	5,45	6,4	7,42	8,53	9,72

notes:
ENCD

DIN ISO 13920 Tolerances B

revisions-no. 07

mm / kg

	date	name
drawn by	31.05.23	PMA
checked by	31.05.23	JAD
approved by	31.05.23	JWY
modified by		

jeremias® CHIMNEY SYSTEMS

description: Elbow 90° with inspection opening (251-600°C/H1), round door.

code: **KL0624HTD ∅**

drawing-no.: **01-10-6554-000**

scale: 1:10

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.