
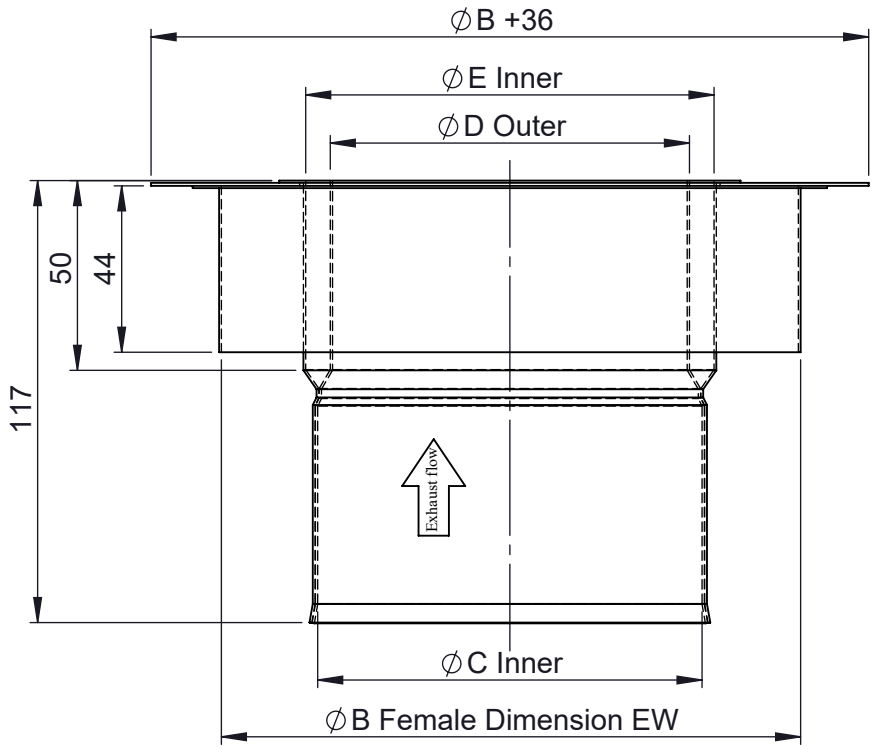


10.757.150 (1:4)

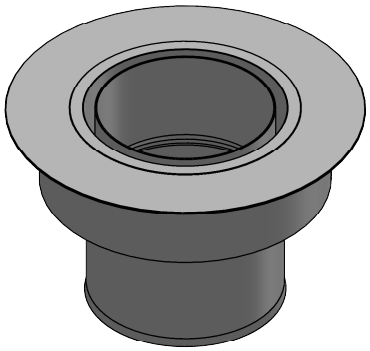

∅	100-080	120-080	130-080	150-080	120-100	130-100	150-100	130-110	150-110	140-120	150-120
A	080	080	080	080	100	100	100	110	110	120	120
B	100	120	130	150	120	130	150	130	150	140	150
C	082	082	082	082	102	102	102	112	112	122	122
D	075	075	075	075	095	095	095	105	105	115	115
E	088	088	088	088	108	108	108	118	118	128	128
kg	0,43	0,47	0,49	0,53	0,52	0,55	0,59	0,57	0,62	0,62	0,64

∅	180-120	150-130	180-130	200-130	180-140	180-150	200-150	180-160	200-160	200-180	250-200
A	120	130	130	130	140	150	150	160	160	180	200
B	180	150	180	200	180	180	200	180	200	200	250
C	122	132	132	132	142	153	153	162	162	182	202
D	115	125	125	125	135	145	145	155	155	175	195
E	128	138	138	138	148	158	158	168	168	188	208
kg	0,71	0,67	0,74	0,79	0,76	0,79	0,84	0,81	0,86	0,91	1,09

notes:
ENCD

DIN ISO 13920 Tolerances B

revisions-no. 02 | mm / kg

	date	name
drawn by	24.01.23	PMA
checked by	24.01.23	JAD
approved by	24.01.23	JWY
modified by	17.03.23	PMA

jeremias® CHIMNEY SYSTEMS

description: Connection piece with integrated wall sleeve

code: **ZUWA757 ∅**

drawing-no.: **07-03-3302-000**

scale: 1:5

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.