


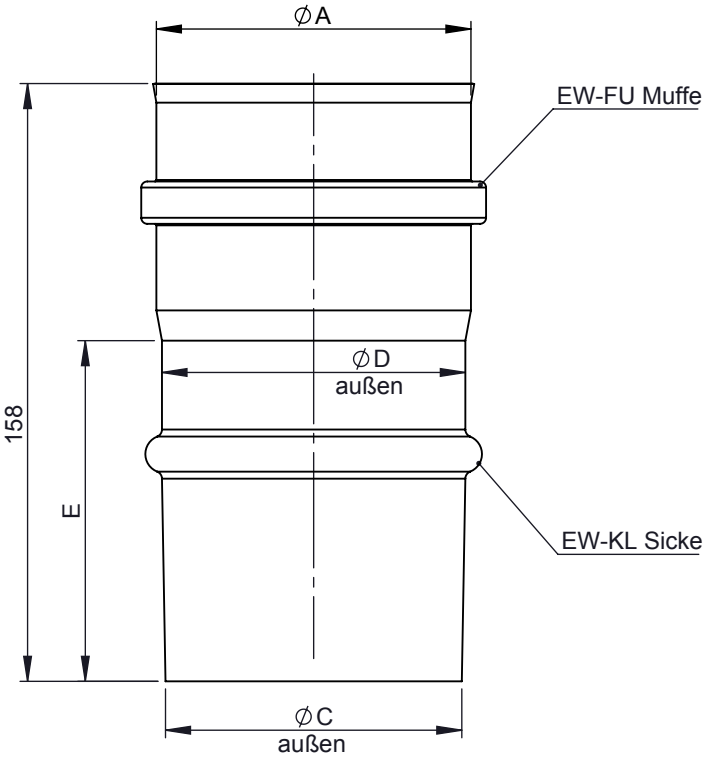


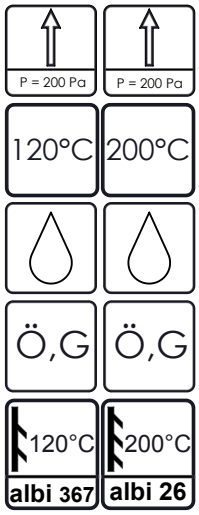

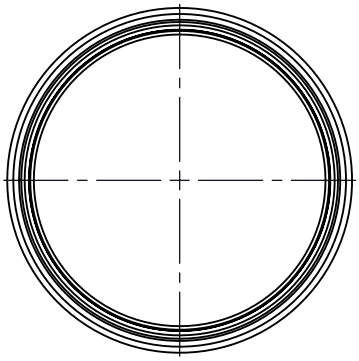

M 1:5 (Ø080)



*Die innenliegenden Dichtringe müssen zusätzlich bestellt werden.
Im Standard erhalten Sie die Dichtung EPDM (albi367) bis 120°C.
Auf Wunsch können Sie die Ausstattung mit der Dichtung (albi26) bis 200°C erhalten

∅	080	100	110	115	130	150	200	250
A	80	100	110	115	130	150	200	250
C	78,4	98,1	108,3		123,2	157,9	198,1	248
D	80,2	99,9	110,2		125,1	151,9	199,9	249,9
E	90	70			90	70	90	90
t	0,6							
Ø-PP-Rohr	80	100	110		125	160	200	250
kg	0,25	0,33	0,34	0,36	0,4	0,48	0,62	0,80

material: inside/outside: 1.4404 (316L)
surface: inside/outside: 2B (3C)
DIN ISO 13920 Tolerances B
revisions-no. A10
mm / kg

jeremias® CHIMNEY SYSTEMS

scale: 1:5
format: A4
sheet: 1 of 1

notes:

	date	name
drawn by	18.12.2017	KAB
checked by		
approved by		
modified by	29.01.2019	RLE

description: Übergang PPS auf Jeremias AL-BI

code: **EW-ALBI88**

drawing-no.: **01-02-3073-000**

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.