


Ausführungsvarianten
für Muffe Innenrohr



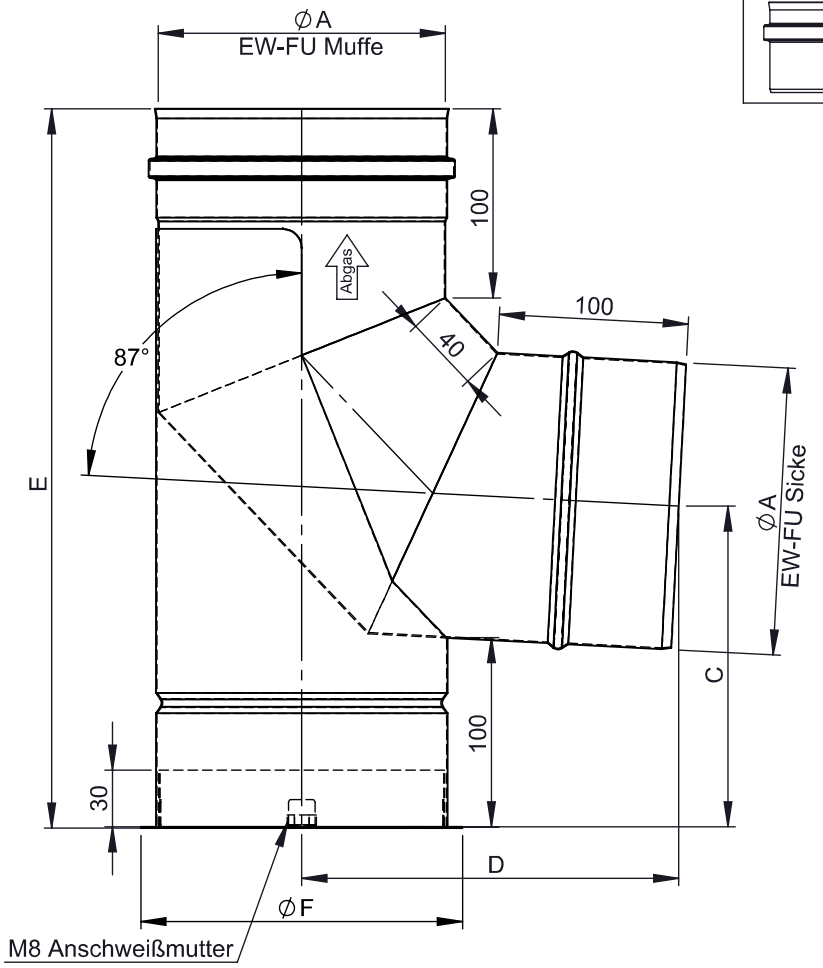

M 1:8 (Ø150)

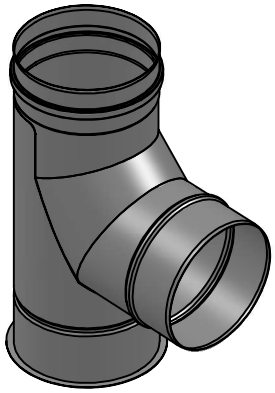

für X auszuwählen:
D= Silikon-Dichtung beigelegt
E= Silikon-Dichtung eingelegt (bis <Ø225mm)
F= Silikon-Dichtung eingeklebt

Ø	060	080	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	60	80	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
C	123	134	144	149	152	154	157	159	164	170	174	184	194	207	219	244	270	295	320	345	370	395
D	156	166	175	180	182	185	187	190	194	199	204	213	223	235	246	270	294	317	341	365	388	412
E	288	309	329	339	344	349	354	359	369	380	389	410	430	455	480	530	580	630	680	730	780	830
F	80	100	120	130	135	140	145	150	160	170	180	200	220	245	270	320	370	420	470	520	570	620
kg	0,49	0,7	0,92	1,03	1,09	1,15	1,22	1,28	1,41	1,56	1,69	2,0	2,31	2,74	3,2	4,21	7,13	8,81	10,66	12,68	14,86	17,21

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1 | mm / kg

	date	name
drawn by	19.10.2018	KAB
checked by		
approved by		
modified by		

jeremias® CHIMNEY SYSTEMS

description: Winkel 87° mit Stützfuß

code: ALBI X 06

drawing-no.: 01-01-02-6400-000

scale: 1:4

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.