


Ausführungsvarianten
für Muffe Innenrohr



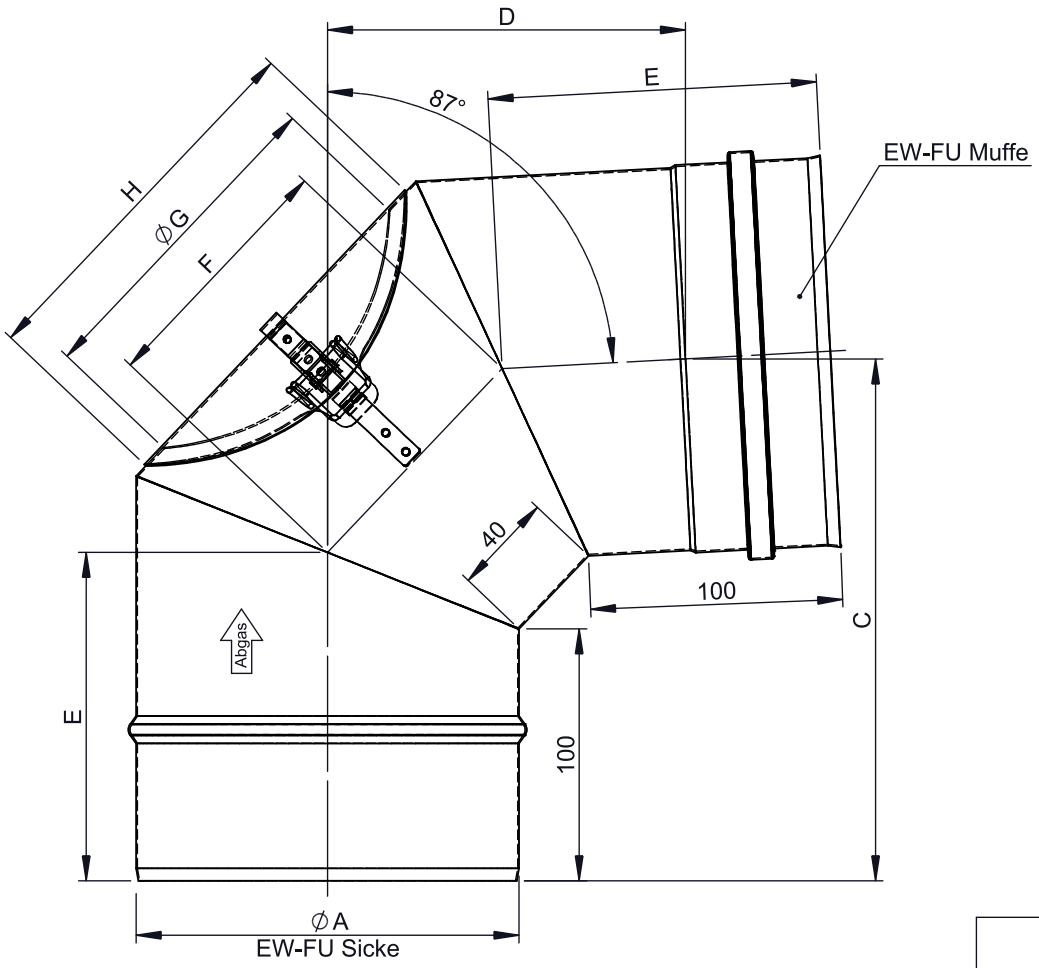

M 1:8 (Ø150)



*Die innenliegenden Dichtringe müssen zusätzlich bestellt werden.
Im Standard erhalten Sie die Dichtung EPDM (albi367) bis 120°C.
Auf Wunsch können Sie die Ausstattung mit der Dichtung (albi26) bis 200°C erhalten

Ø	60	80	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	60	80	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
C	161	172	182	187	189	192	194	197	202	207	212	222	232	244	257	282	306	331	356	381	406	431
D	99	109	118	123	125	128	130	133	137	142	147	156	166	178	189	213	237	260	284	308	332	355
E	112	116	120	122	123	124	125	126	128	130	132	136	140	145	150	160	170	180	190	200	210	220
F	64	72	80	84	86	88	90	92	96	101	104	112	120	130	140	160	180	200	220	240	260	280
G	60	80	100							130		150		180			200	250				
H	80	100	120							150		170		200			220	270				
kg	0,31	0,44	0,56	0,63	0,66	0,69	0,73	0,76	0,83	0,93	1	1,17	1,33	1,57	1,81	2,33	3,8	4,67	5,6	6,61	7,71	8,88

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1 | mm / kg

	date	name
drawn by	10.11.2021	API
checked by		
approved by		
modified by		

jeremias® CHIMNEY SYSTEMS

description: Winkel 87° mit Revision (200°C/P1), runde Öffnung

code: **ALBI06 x 14**

drawing-no.: **01-01-02-6506-000**

scale: 1:3

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.