


Ausführungsvarianten
für Muffe Innenrohr



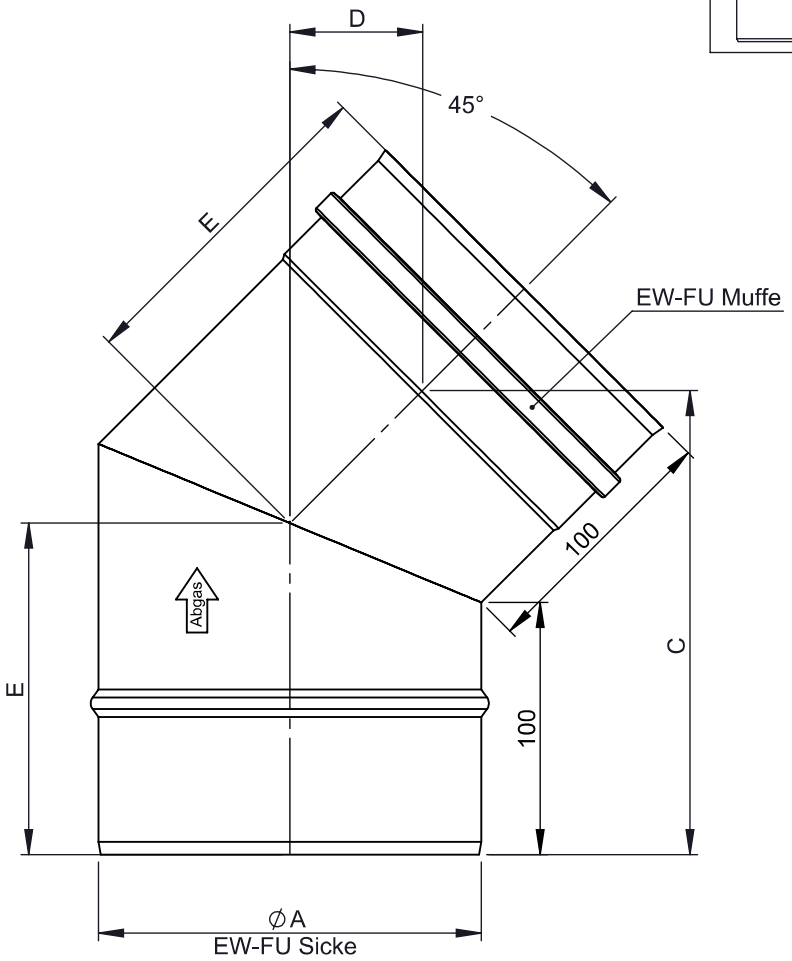

M 1:5 (Ø150)

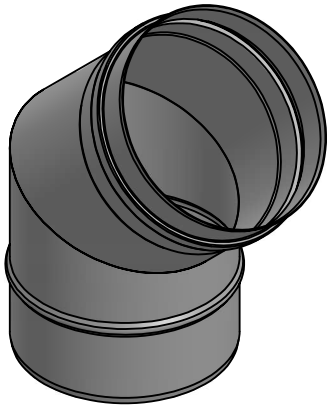

für X auszuwählen:
D = Silikon-Dichtung beigelegt
E = Silikon-Dichtung eingelegt (bis <Ø225mm)
F = Silikon-Dichtung eingeklebt

Ø	080	100	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600	650
A	80	100	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600	650
C	159	166	171	173	177	180	184	187	195	201	210	219	237	254	272	290	308	325	343	361
D	42	45	47	48	50	51	53	54	57	60	64	67	74	82	89	96	104	111	118	126
E	117	121	124	125	127	129	131	133	138	142	147	152	162	173	183	193	204	214	224	235
kg	0,3	0,38	0,45	0,47	0,52	0,57	0,62	0,67	0,78	0,89	1,03	1,19	1,52	2,5	3,02	3,59	4,19	4,84	5,53	6,26

notes:

DIN ISO 13920 Tolerances B

revisions-no. A4 | mm / kg

	date	name
drawn by	02.06.2018	KAB
checked by		
approved by		
modified by	12.03.2019	NGR

jeremias® CHIMNEY SYSTEMS

description: Winkel 45° starr (handgeschweißt)

code: ALBI06 X 19

drawing-no.: **01-01-20-6100-000**

scale: 1:3

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.