


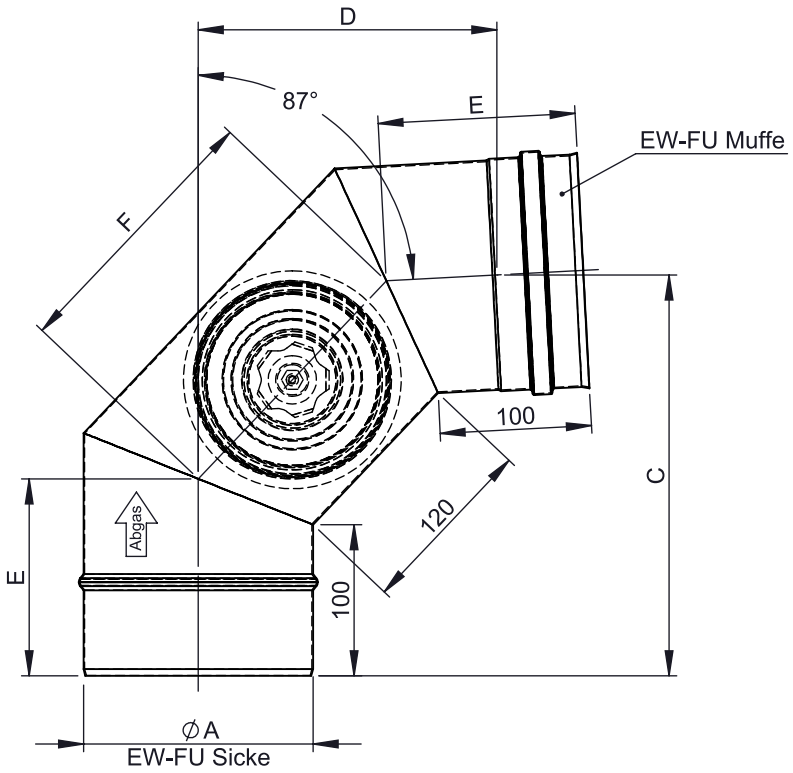


Ausführungsvarianten
für Muffe Innenrohr



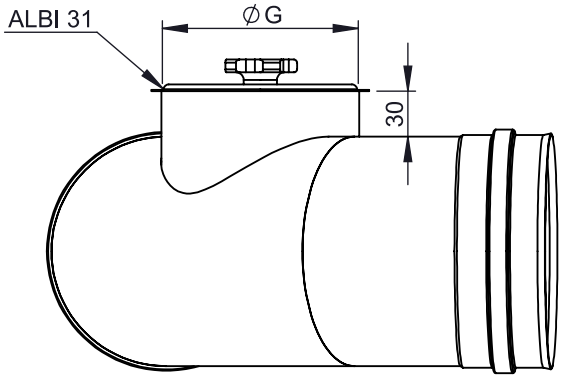

M 1:8 (Ø150)



für X auszuwählen:
D = Silikon-Dichtung beigelegt
E = Silikon-Dichtung eingelegt (bis <Ø225mm)
F = Silikon-Dichtung eingeklebt

Ø	80	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	80	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
C	230	240	245	247	250	252	255	260	265	270	280	290	302	315	340	365	389	414	439	464	489
D	164	173	178	180	183	185	188	192	197	202	211	221	233	244	268	292	316	339	363	387	410
E	116	120	122	123	124	125	126	128	130	132	136	140	145	150	160	170	180	190	200	210	220
F	152	160	164	166	168	170	172	176	181	184	192	200	210	220	240	260	280	300	320	340	360
G	80	100					130			150			180			200	250				
kg	0,85	1,1	1,19	1,24	1,29	1,35	1,5	1,6	1,72	1,9	2,14	2,39	2,83	3,18	3,94	4,87	6,35	7,36	8,44	9,6	10,9

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1 | mm / kg

	date	name
drawn by	13.12.2021	API
checked by		
approved by		
modified by	31.08.2023	AST

jeremias® CHIMNEY SYSTEMS

description: Winkel 87° mit Revision (bis 200°C/P1), runde Öffnung mit Stutzen 270° radial versetzt, WIG-geschweißt

code: **ALBI06 X 2771**

drawing-no.: **01-01-02-6505-000**

scale: 1:5

format: A4

sheet: 1 of 1

AST

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.