


Ausführungsvarianten
für Muffe Innenrohr



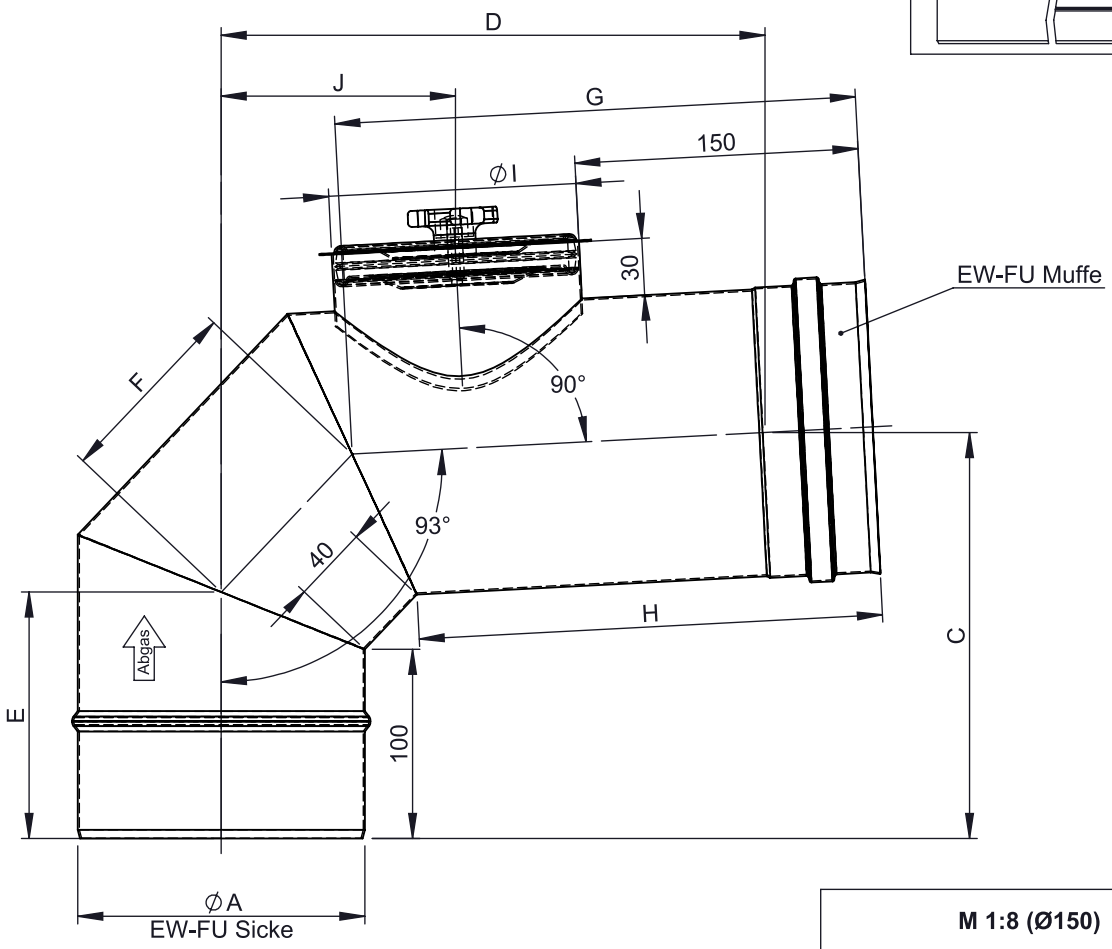

M 1:8 (Ø150)

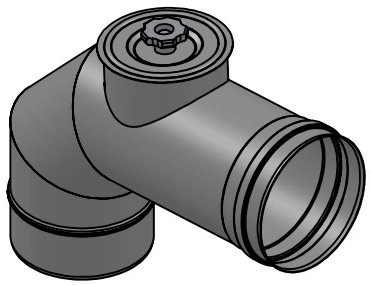

für X auszuwählen:
D = Silikon-Dichtung beigelegt
E = Silikon-Dichtung eingelegt (bis <Ø225mm)
F = Silikon-Dichtung eingeklebt

Ø	80	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	80	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
C	178	189	194	196	198	201	205	209	215	220	230	239	253	265	289	314	340	364	388	412	436
D	232	254	255			256	286	287	288	309	311	312	343	345	349	373	426	430	434	438	441
E	116	120	122	123	124	125	126	128	130	132	136	140	145	150	160	170	180	190	200	210	220
F	72	80	84	86	88	90	92	96	101	104	112	120	130	140	160	180	200	220	240	260	280
G	240	256	254	253	252	251	280	278	276	295	291	287	311	306	296	306	346	336	326	316	306
H	224	236	232	230	228	226	254	250	245	263	255	247	266	256	236	236	266	246	226	206	186
I	80	100					130			150			180			200	250				
J	95	106	107			108	123		124	135	136	137	153	154	156	169	196	198	201	203	206
kg	0,92	1,21	1,31	1,36	1,41	1,46	1,69	1,8	1,92	2,16	2,41	2,65	3,22	3,57	4,28	5,26	7,04	7,95	8,92	9,91	10,9

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1 | mm / kg

	date	name
drawn by	13.12.2021	API
checked by		
approved by		
modified by	31.08.2023	AST

jeremias® CHIMNEY SYSTEMS

description: Winkel 93° mit Revision (bis 200°C/P1), runde Öffnung mit Stutzen am verlängertem Ausgangssegment, WIG-geschweißt

code: **ALBI06 X 2772**

drawing-no.: **01-01-02-6286-000**

scale: 1:4

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.