





A (5 : 1)

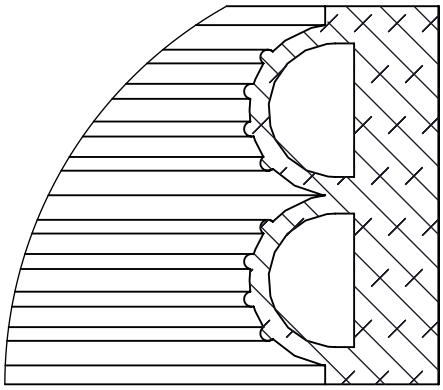

M 1:3 (Ø150)

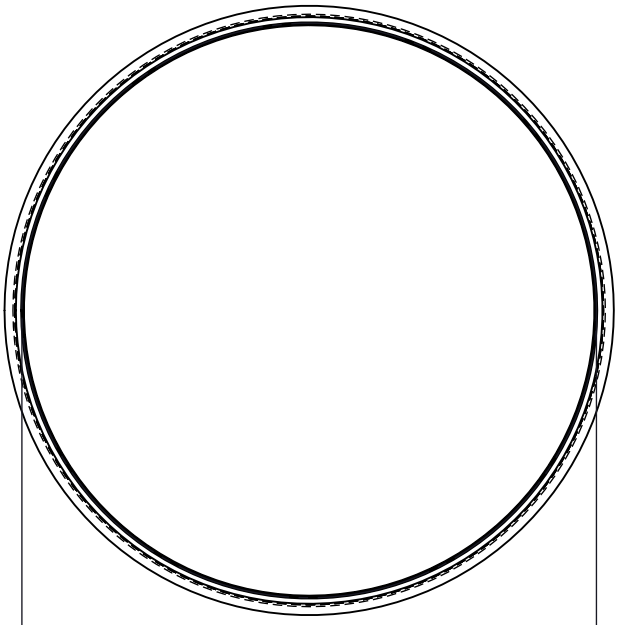

Ø	60	80	90	100	110	111	113	115	120	125	130	140	150	160	163	165	170
A	60	80	90	100	110	111	113	115	120	125	130	140	150	160	163	165	170
kg	0,01	0,02			0,03									0,04	0,04	0,04	0,04

Ø	180	200	205	225	230	240	250	260	265	270	280	290	300	315	320	350	360	365
A	180	200	205	225	230	240	250	260	265	270	280	290	300	315	320	350	360	365
kg	0,04	0,05					0,06					0,07				0,08		

Ø	400	450	480	500	550	560	600	635	650	700	750	800	850	900	950	1000	1100
A	400	450	480	500	550	560	600	635	650	700	750	800	850	900	950	1000	1100
kg	0,09	0,1	0,11	0,11	0,12	0,13	0,14	0,14	0,15	0,16	0,17	0,18	0,19	0,2	0,22	0,23	0,25

notes:

DIN ISO 13920 Tolerances B

revisions-no. A2 | mm / kg

	date	name
drawn by	13.10.2025	SHO
checked by		
approved by		
modified by	27.05.2026	SHO

jeremias® CHIMNEY SYSTEMS

description: Dichtring innenliegend Silikon blau 200°C

code: **ALBI26**

drawing-no.: **01-01-02-9034-000**

scale: 1:2

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.