

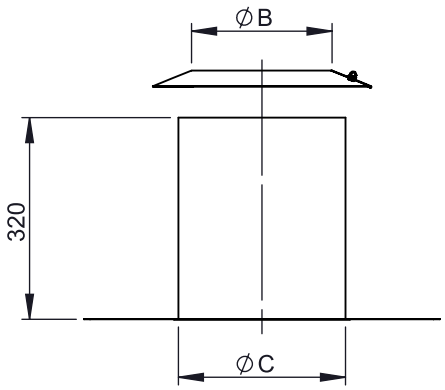


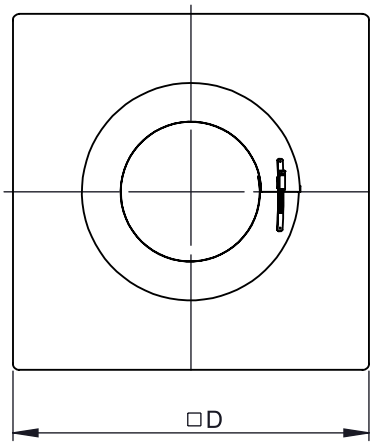

mögliche Materiallösungen	
WGR	**Material**
2R2-ZUAC52∅ZY	1.4301(304)-2R(IIID)
2B2-ZUAC52∅ZY	1.4301(304)-2B(IIIC)
2J2-ZUAC52∅ZY	1.4301(304)-2J(GEB)
CU-ZUAC52∅ZY	2.0090(SFCU)
VZ-ZUAC52∅ZY	1.0226(DX51D)-VZ(VZ)

∅ - System-Außendurchmesser
(gilt für einwandige und doppelwandige Systeme)

M 1:18 (Ø150)



Ø												**80**			**100**		**110**	**115**	**120**	**125**	**130**	
B												145			165		175	180	185	190	195	
C								190					215				240						
D								490					515				540						
kg												2,16			2,39		2,6	2,61	2,61	2,88	2,62	
Ø	**140**		**150**		**160**			**180**				**200**				**225**			**250**				
B	205		215		225			245				265				290			315				
C	265				290				315				340				365						
D	565				590				615				640				665						
kg	2,84		2,85		3,06			3,08				3,65				3,91			3,78				
Ø				**300**		**350**		**400**			**450**			**500**		**550**			**600**		**650**		
B				365		415		465			515			565		615			665		715		
C		415			465		515			565			615		665			715		765			
D		715			765		815			865			915		965			1015		1065			
kg				4,25		4,73		5,22			5,71			6,2		7,39			7,21		7,72		

notes:

DIN ISO 13920 Tolerances B

revisions-no. A | mm / kg

	date	name
drawn by	31.03.2021	TRA
checked by		
approved by		
modified by	20.08.2025	MNA

jeremias® CHIMNEY SYSTEMS

description: Flachdachdurchführung zylindrisch mit Wetterkragen
passend für Isolierstärke 32,5 mm

code: **DW52ZY / DWV52ZY**

drawing-no.: **01-07-04-5401-000**

scale: 1:12

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.