
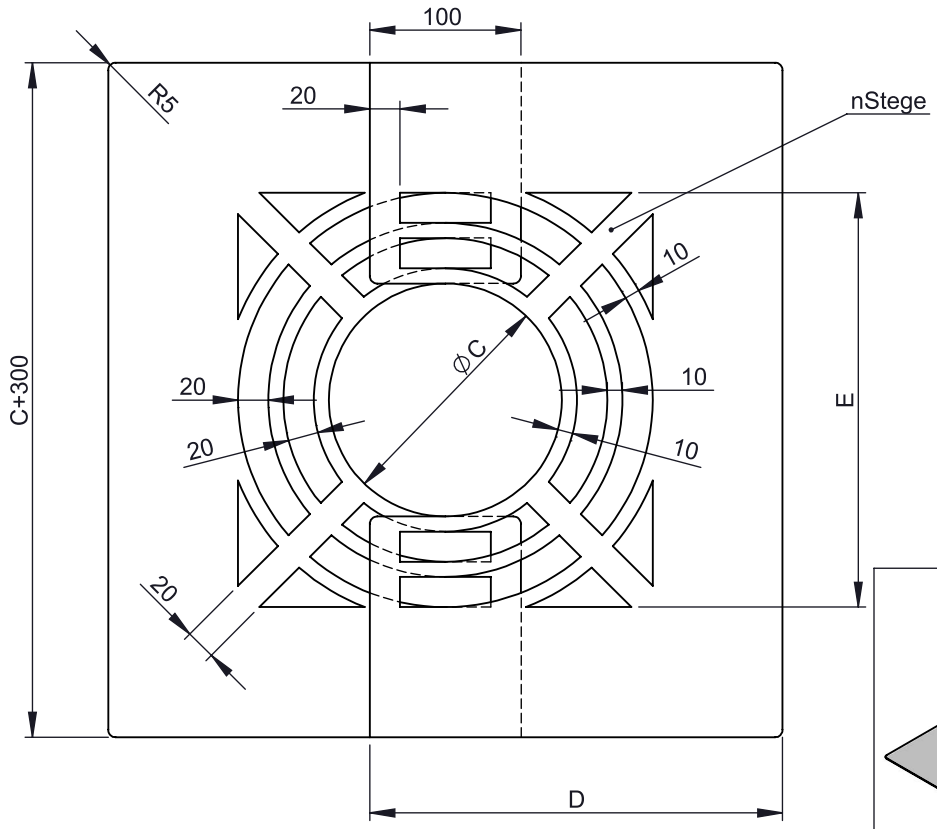


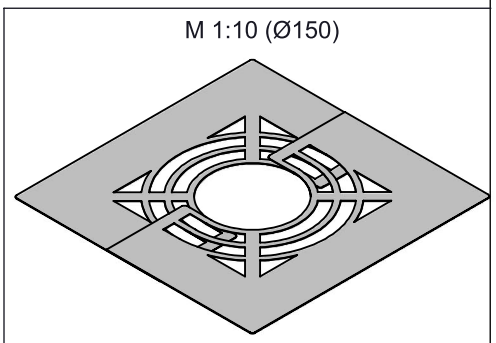

Ø												**80**			**100**		**110**	**115**	**120**	**125**	**130**		**140**
C												148			168		178	183	188	193	198		208
D												271			281		286	288	291	294	296		301
E												268			288		298	303	308	313	318		328
n	4																						
kg															0,86		0,88	0,89	0,9	0,91	0,92		0,95
Ø		**150**		**160**				**180**				**200**				**225**			**250**				
C		218		228				248				268				293			318				
D		306		311				321				331				344			356				
E		338		348				368				388				413			438				
n	4																						
kg		0,97		0,99				1,05				1,09				1,15			1,2			1,27	1,28
Ø		**300**		**350**		**400**			**450**			**500**		**550**			**600**		**650**		**700**		**750**
C		368		418		468			518			568		618			668		718		768		818
D		381		406		431			456			481		506			531		556		581		606
E		488		538		588			638			688		738			788		838		888		938
n	4			6																		12	
kg		1,33		1,44		1,57			1,69			1,81		1,94			2,07		2,19		2,32		2,5

notes:

DIN ISO 13920 Tolerances B

revisions-no. A2 | mm / kg

	date	name
drawn by	17.03.2021	TRA
checked by		
approved by		
modified by	29.10.2025	AST

jeremias CHIMNEY SYSTEMS

description: Deckenblende für Hinterlüftung
zweiteilig, 0°
passend für Isolierstärke 32,5mm

code: **DW74HL / DWV74HL**

drawing-no.

scale: 1:5

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.