
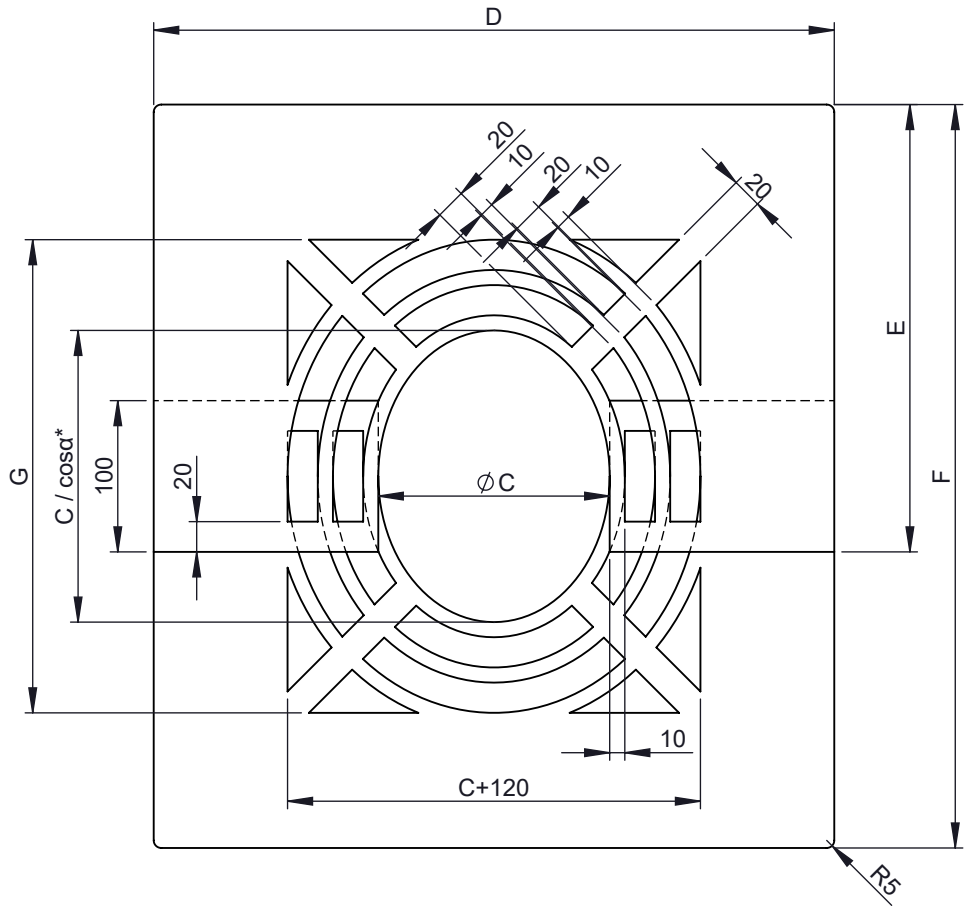


*α= Winkel zwischen 31° - 45°

M 1:14 (Ø150)



Ø	60	65	80	95	100	110	115	120	125	130	140	145	150	160	165	170	175	180	185	190	195
C	63	68	83	98	103	113	118	123	128	133	143	148	153	163	168	173	178	183	188	193	198
D	360	365	380	395	400	410	415	420	425	430	440	445	450	460	465	470	475	480	485	490	495
E	238	242	251	261	264	270	273	276	279	283	289	292	296	302	305	308	311	314	317	320	324
F	376	383	402	421	427	440	446	453	459	465	478	484	492	503	509	516	522	529	535	541	547
G	199	206	225	244	250	262	269	275	281	288	300	307	313	325	332	338	344	351	357	363	370
kg	0,66	0,68	0,71	0,75	0,76	0,79	0,8	0,81	0,82	0,84	0,86	0,87	0,89	0,91	0,92	0,94	0,95	0,96	0,97	0,98	1

Ø	200	205	210	215	220	225	230	235	240	245	250	255	260	265	275	280	285	290	295	300	315
C	203	208	213	218	223	228	233	238	243	248	253	258	263	268	278	283	288	293	298	303	318
D	500	505	510	515	520	525	530	535	540	545	550	555	560	565	575	580	585	590	595	600	615
E	327	330	333	336	339	342	346	349	352	355	358	361	365	368	374	379	380	383	387	390	399
F	553	560	566	572	579	585	591	598	604	610	616	623	629	635	648	658	661	667	673	679	698
G	376	382	388	395	401	407	414	420	426	433	439	445	452	458	470	477	483	489	496	502	521
kg	1,01	1,02	1,03	1,05	1,06	1,07	1,08	1,1	1,12	1,14	1,15	1,16	1,18	1,19	1,22	1,24	1,24	1,25	1,27	1,28	1,32

Ø	320	325	345	350	360	365	400	415	450	465	480	500	515	550	560	565	600	615	635	650	665
C	323	328	348	353	363	368	403	418	453	468	483	503	518	553	563	568	603	618	638	653	668
D	620	625	645	650	660	665	700	715	750	765	780	800	815	850	860	865	900	915	935	950	965
E	402	406	418	421	428	431	453	462	484	494	503	516	525	547	554	557	579	588	601	610	620
F	705	711	736	743	755	761	806	824	869	887	906	932	950	995	1007	1014	1058	1077	1102	1121	1140
G	527	533	559	565	578	584	628	647	691	710	729	754	773	817	830	836	880	899	924	943	962
kg	1,33	1,34	1,4	1,41	1,44	1,45	1,57	1,61	1,7	1,74	1,78	1,84	1,89	1,99	2,02	2,04	2,13	2,18	2,28	2,32	2,37

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1 | mm / kg

	date	name
drawn by	14.12.2022	OPA
checked by		
approved by		
modified by		

jeremias® CHIMNEY SYSTEMS

description: Deckenblende für Hinterlüftung zweiteilig, 31-45°

code: **2R2-ZUAC98VHL**

drawing-no.: **01-07-04-5524-000**

scale: 1:5

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.