


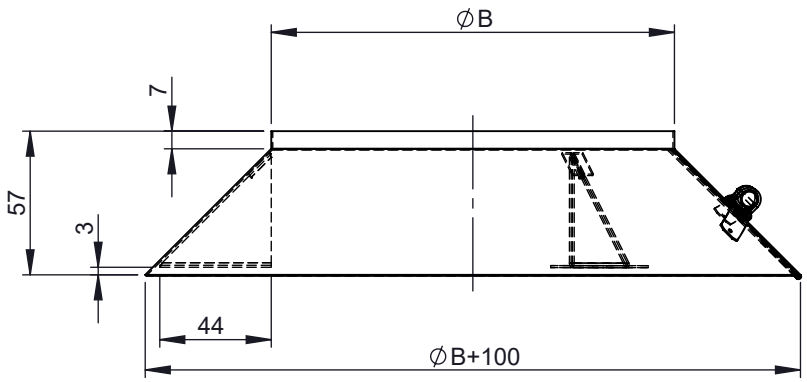


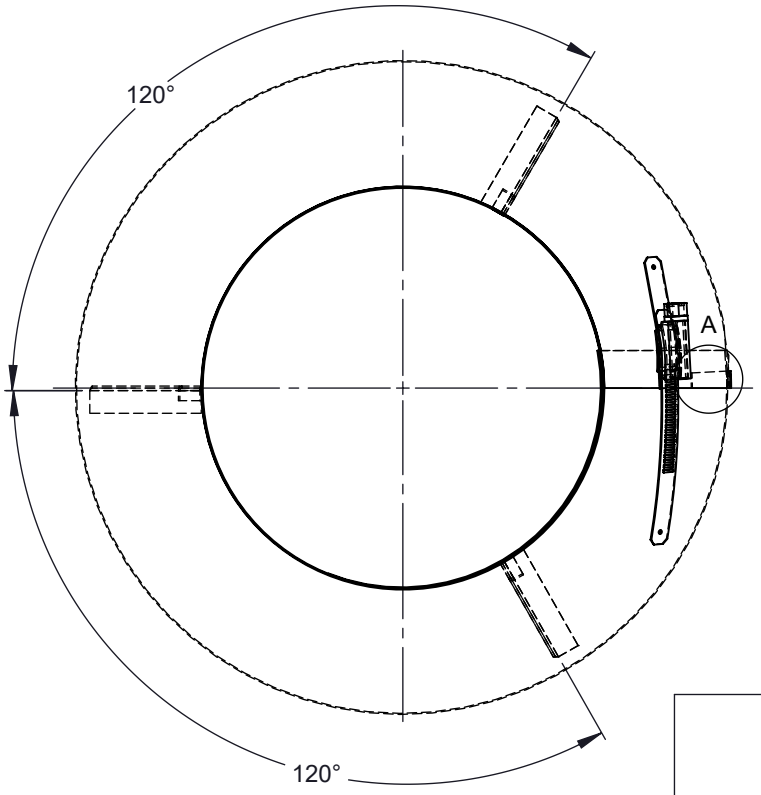



A (2 : 3)

M 1:10 (Ø150)



Ø	145	150	160	165	170	175	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265
B	145	150	160	165	170	175	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265
kg	0,27	0,28	0,29	0,3	0,3	0,31	0,32	0,32	0,33	0,33	0,34	0,35	0,36	0,36	0,36	0,37	0,37	0,37	0,39	0,39	0,4	0,4	0,41	0,41

Ø	275	280	285	290	295	300	315	325	340	345	350	365	400	415	450	465	500	515	550	565	600	615	650	665
B	275	280	285	290	295	300	315	325	340	345	350	365	400	415	450	465	500	515	550	565	600	615	650	665
kg	0,43	0,43	0,44	0,45	0,45	0,47	0,47	0,48	0,5	0,51	0,51	0,53	0,57	0,59	0,63	0,65	0,69	0,7	0,75	0,76	0,8	0,82	0,86	0,88

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1 | mm / kg

	date	name
drawn by	22.09.2022	OPA
checked by		
approved by		
modified by	22.02.2023	API

jeremias® CHIMNEY SYSTEMS

description: Wetterkragen mit Rand und Abstandshalter

code: **2R2-ZUAC2856**

drawing-no.: **01-07-06-5451-000**

scale: 1:3

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.