



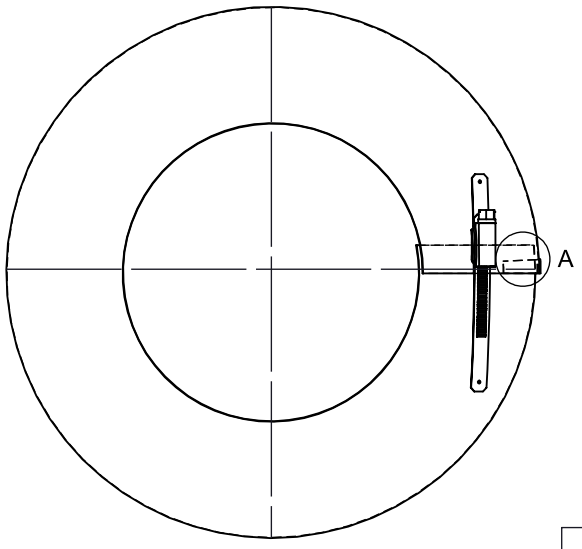




A (1 : 2)

Beispiel für mögliche Materiallösungen	
WGR	**MAT**
2R2	1.4301(304)-2R(IIID)
2B2	1.4301(304)-2B(IIIC)
2J2	1.4301(304)-2J(GEB)FO
CU	2.0090(SFCU)

***Durchmesser B ist verstellbar, dadurch kann der Wetterkragen am Klemmband montiert werden (Typ ZUAC41)**

M 1:6 (Ø150)

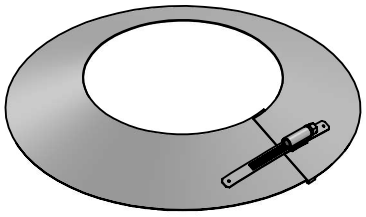

Ø														**80**			**100**		**110**
B														145			165		175
kg														0,5					
Ø	**115**	**120**		**130**		**140**		**150**		**160**				**180**				**200**	
B	180	185		195		205		215		225				245				265	
kg	0,5			0,6										0,7					
Ø				**225**					**250**									**300**	
B				290					315									365	
kg				0,8										0,9					
Ø	**350**		**400**			**450**			**500**		**550**			**600**					
B	415		465			515			565		615			665					
kg	1,0		1,1		1,2		1,3			1,4		1,5							

notes:

DIN ISO 13920 Tolerances B

revisions-no. A2 | mm / kg

	date	name
drawn by	15.05.2019	SME
checked by		
approved by		
modified by	06.08.2025	MNA

jeremias® CHIMNEY SYSTEMS

description: Wetterkragen / Wandrosette
passend für Isolierstärke 32,5 mm

code: **DW31 / DWV31**

drawing-no.: **01-07-04-5450-000**

scale: 1:4

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.