

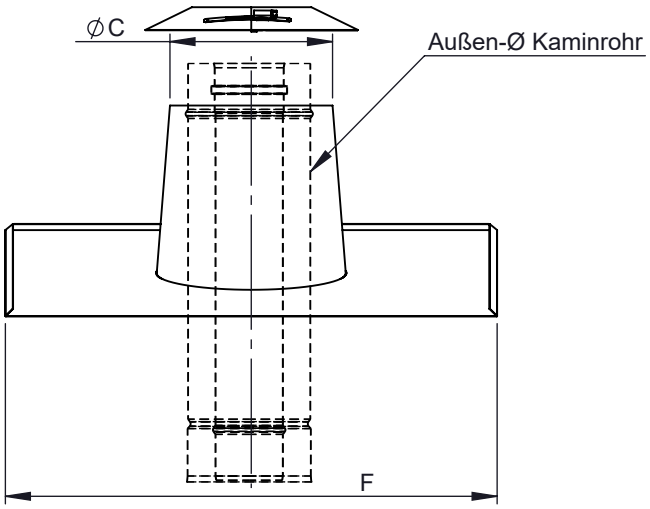


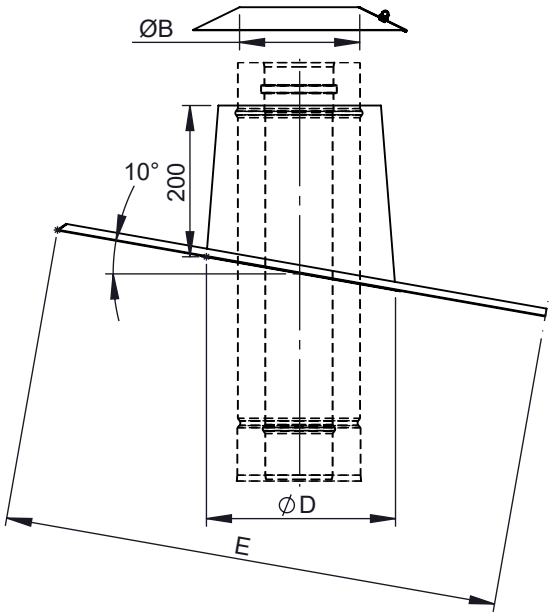

mögliche Materiallösungen	
WGR	**Material**
2R2-ZUAC81 ⌀	**Kegel:** 1.4301(304)-2R(IIID)
	Platte: 1.4301(304)-2R(IIID)
	Wetterkragen:1.4301(304)-2R(IIID)
2B2-ZUAC81 ⌀	**Kegel:** 1.4301(304)-2B(IIIC)
	Platte: 1.4301(304)-2B(IIIC)
	Wetterkragen: 1.4301(304)-2B(IIIC)
2J2-ZUAC81 ⌀	**Kegel:** 1.4301(304)-2J(GEB)
	Platte: 1.4301(304)-2J(GEB)
	Wetterkragen: 1.4301(304)-2J(GEB)
CU-ZUAC81 ⌀	**Kegel:** 2.0090(SFCU)
	Platte: 2.0090(SFCU)
	Wetterkragen:2.0090(SFCU)
VZ-ZUAC81 ⌀	**Kegel:** 1.0226(DX51D)-VZ(VZ)
	Platte: 1.0226(DX51D)-VZ(VZ)
	Wetterkragen:1.0226(DX51D)-VZ(VZ)

M 1:16 (Ø150)

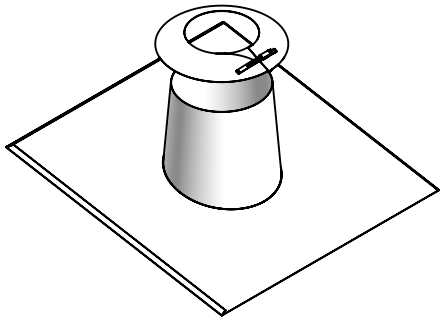

⌀ - System-Außendurchmesser
(gilt für einwandige und doppelwandige Systeme)

Ø	**60**	**65**	**80**	**95**	**100**	**110**	**115**	**120**	**125**	**130**	**140**	**145**	**150**	**160**	**165**	**170**	**175**	**180**	**185**	**190**	**195**	**200**
ØB	60	65	80	95	100	110	115	120	125	130	140	145	150	160	165	170	175	180	185	190	195	200
ØC	115		140		165				190				215				240					265
ØD	150		175		200				225				250				275					300
E	553		579		604				630				655				680					706
F	550		575		600				625				650				675					700
kg	1,92	2,2	2,27	2,12	2,49	2,5		2,51	2,71	2,72	2,73		2,94	2,95	2,96		3,18		3,19		3,2	3,41

Ø	**205**	**210**	**215**	**220**	**225**	**230**	**235**	**240**	**245**	**250**	**255**	**260**	**265**	**275**	**280**	**285**	**290**	**295**	**300**	**315**	**320**	**325**
ØB	205	210	215	220	225	230	235	240	245	250	255	260	265	275	280	285	290	295	300	315	320	325
ØC	265				290					315				340					365			390
ØD	300				325					350				375					400			425
E	706				731					757				782					807			833
F	700				725					750				775					800			825
kg	3,42		3,43		3,65	3,66	3,97		3,67	3,89	3,9		3,91	4,14	4,15			4,16	4,38	4,4		4,64

Ø	**345**	**350**	**360**	**365**	**400**	**415**	**450**	**465**	**480**	**500**	**515**	**550**	**560**	**565**	**600**	**615**	**635**	**650**	**665**	**700**	**715**	
ØB	345	350	360	365	400	415	450	465	480	500	515	550	560	565	600	615	635	650	665	700	715	
ØC	390	415			465		515		540	565		615			665		690	715		765		
ØD	425	450			500		550		575	600		650			700		725	750		800		
E	833	858			909		960		985	1010		1061			1112		1137	1163		1214		
F	825	850			900		950		975	1000		1050			1100		1125	1150		1200		
kg	5,07	4,89	4,9		5,88	5,42	5,93	5,95	6,2	6,47	6,48	7,02	7,66	7,03	7,58	7,6	7,88	8,16	8,17	8,74	9,54	

notes:

DIN ISO 13920 Tolerances B

revisions-no. A | mm / kg

	date	name
drawn by	24.02.2021	TRA
checked by		
approved by		
modified by		

jeremias® CHIMNEY SYSTEMS

description: Dachdurchführung 5-15° mit Wetterkragen

code: **WGR-ZUAC81 ⌀**

drawing-no.: **01-07-04-5301-000**

scale: 1:10

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.