



A (1 : 2)

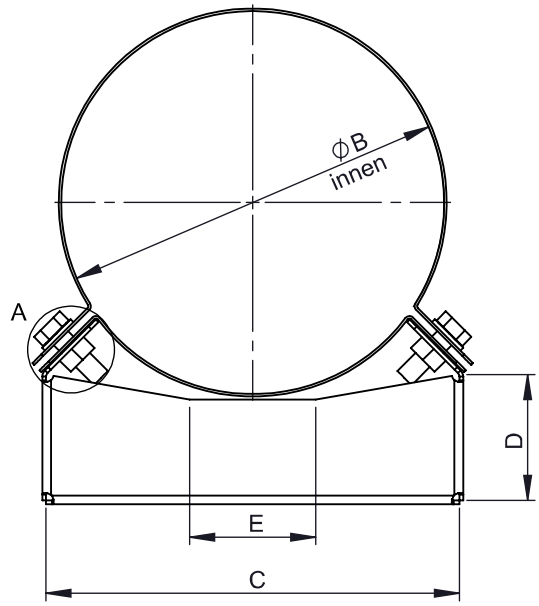

M 1:5 (Ø150)



Beispiel für mögliche Materiallösungen	
WGR	**MAT**
302	1.4301(304)-2R(IIID)
330	1.4301(304)-2B(IIIC)
350	1.4301(304)-2J(GEB)FO

Ø	**060**	**080**
B	176	196
C	164	195
D	50	61
E	50	
F	50	
G	100	120
kg	0,57	0,66

Ø	**100**	**110**	**115**	**120**	**125**	**130**	**140**	**150**	**160**	**180**
B	216	226	231	236	241	246	256	266	276	296
C	210					225		255		
D	61					62		75		
E	50									
F	50									
G	135					150		180		
kg	0,7	0,71	0,72	0,73	0,76	0,77	0,85	0,86		0,89

Ø	**200**	**250**	**300**	**350**	**400**	**450**	**500**	**550**
B	316	366	416	466	516	566	616	666
C	295	328		417		480		635
D	80	87		115		128		199
E	80			150		140		240
F	50							
G	215	250		339		380		535
kg	0,97	1,09	1,15	1,39	1,46	1,66	1,72	2,23

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1 | mm / kg

	date	name
drawn by	17.03.2021	KSA
checked by		
approved by		
modified by	05.06.2025	USC

jeremias® CHIMNEY SYSTEMS

description: Wandhalter starr, Wandabstand 50mm (Typ A) passend für Isolierstärke 57,5mm

code: **302-DW21 / DWVG21 / DWPW21**

drawing-no.: **01-07-04-0200-000**

scale: 1:3

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.