
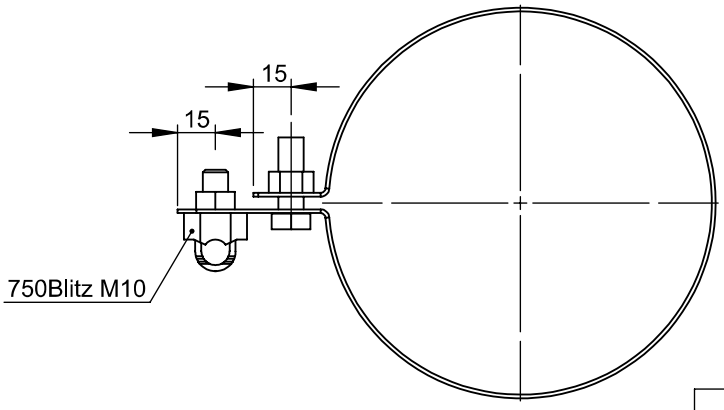



**M 1:4 (Ø150)**

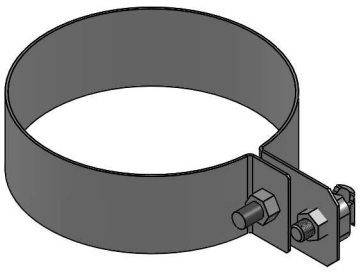

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Ø** | - | - | | | | | | | | | | | | | | | | | | | **80** | | | | **100** |
| **A** | - | - | | | | | | | | | | | | | | | | | | | 195 | | | | 215 |
| **kg** | - | - | | | | | | | | | | | | | | | | | | | 0,51 | | | | 0,55 |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Ø** | | **110** | **115** | **120** | **125** | **130** | | **140** | | **150** | **160** | | | | **180** | | **200** | | | | | | **250** | | **300** |
| **A** | | 225 | 230 | 235 | 240 | 245 | | 255 | | 265 | 275 | | | | 295 | | 315 | | | | | | 365 | | 415 |
| **kg** | | 0,57 | 0,58 | 0,59 | 0,6 | 0,61 | | 0,63 | | 0,64 | 0,66 | | | | 0,7 | | 0,74 | | | | | | 0,83 | | 0,92 |

notes:

DIN ISO 13920 Tolerances B

revisions-no. A3 | mm / kg

| | date | name |
|---|---|---|
| drawn by | 28.03.2018 | KAB |
| checked by | | |
| approved by | | |
| modified by | 21.08.2025 | MNA |

jeremias® CHIMNEY SYSTEMS

description: Blitzschutzschelle
passend für Isolierstärke 57,5 mm

code: **302-DW69 / DWVG69 / DWPW69**


drawing-no.: **01-07-04-9001-000**


scale: 1:3

format: A4


sheet: 1 of 2

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.

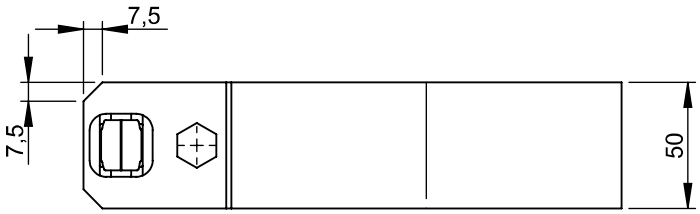

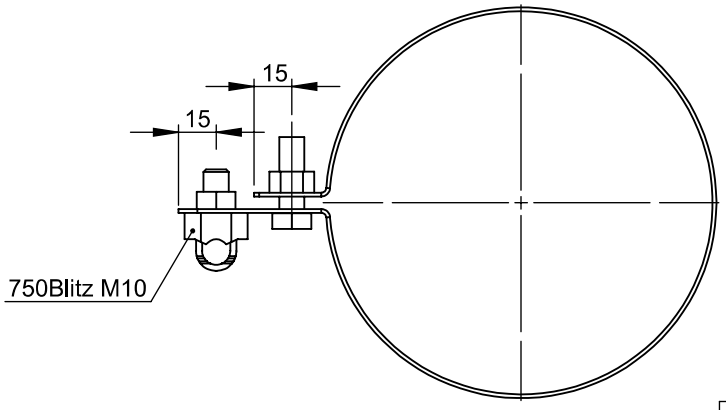
**M 1:4 (Ø150)**

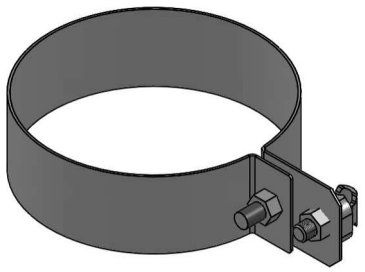

| Ø | | 350 | | | 400 | | | 450 | | 500 | | | 550 | | 600 | | 650 | | 700 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| A | | 465 | | | 515 | | | 565 | | 615 | | | 665 | | 715 | | 765 | | 815 | |
| kg | | 1,02 | | | 1,11 | | | 1,2 | | 1,3 | | | 1,39 | | 1,48 | | 1,57 | | 1,67 | |

| Ø | 750 | | 800 | | 850 | | 900 | | 950 | | 1000 | | 1050 | | 1100 | | 1150 | | 1200 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| A | 865 | | 915 | | 965 | | 1015 | | 1065 | | 1115 | | 1165 | | 1215 | | 1265 | | 1315 |
| kg | 1,76 | | 1,85 | | 1,95 | | 2,04 | | 2,13 | | 2,23 | | 2,32 | | 2,41 | | 2,51 | | 2,6 |

notes:

DIN ISO 13920 Tolerances B

revisions-no. A3 | mm / kg

| | date | name |
|---|---|---|
| drawn by | 28.03.2018 | KAB |
| checked by | | |
| approved by | | |
| modified by | 21.08.2025 | MNA |

jeremias® CHIMNEY SYSTEMS

description: Blitzschutzschelle
passend für Isolierstärke 57,5 mm

code: **302-DW69 / DWVG69 / DWPW69**

drawing-no.: **01-07-04-9001-000**

scale: 1:3

format: A4

sheet: 2 of 2

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.