
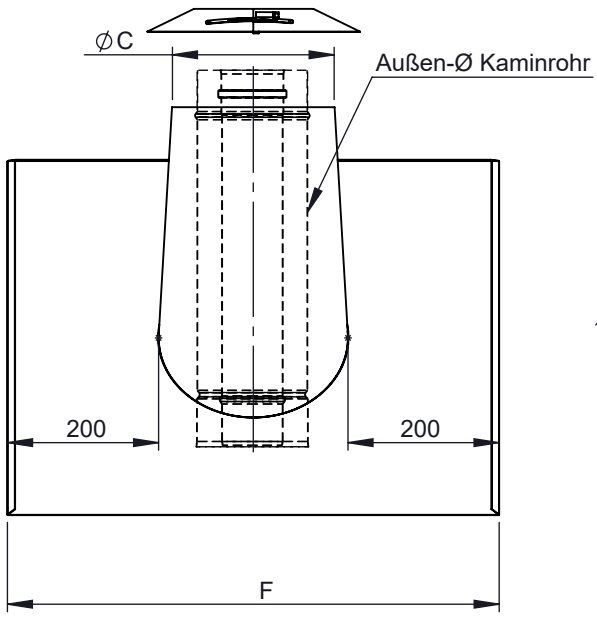
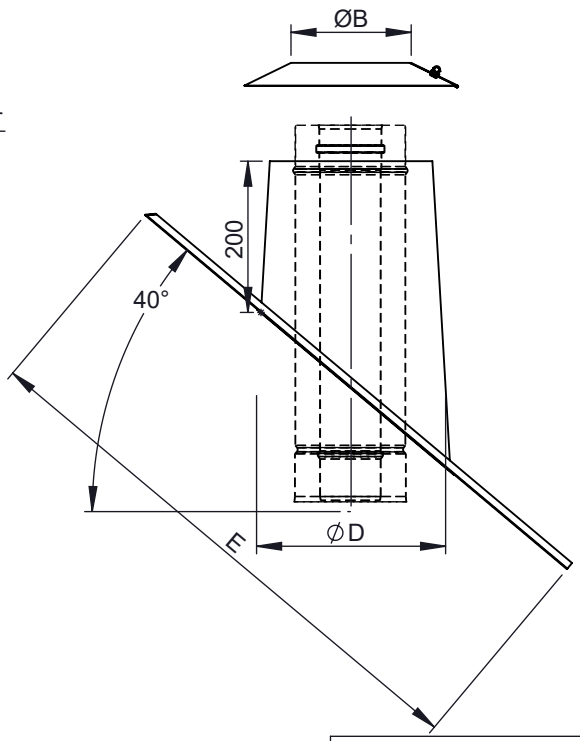



M 1:20 (Ø150)

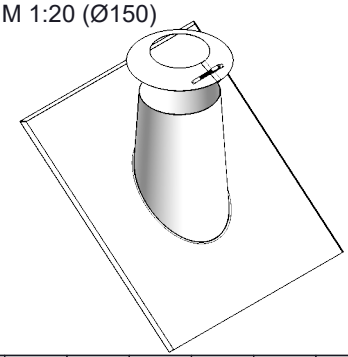

| mögliche Materiallösungen | |
|---|---|
| **WGR** | **Material** |
| **2R2**-ZUAC83∅ | 1.4301(304)-2R(IIID) |
| **2B2**-ZUAC83∅ | 1.4301(304)-2B(IIIC) |
| **2J2**-ZUAC83∅ | 1.4301(304)-2J(GEB) |
| **CU**-ZUAC83∅ | 2.0090(SFCU) |
| **VZ**-ZUAC83∅ | 1.0226(DX51D)-VZ(VZ) |

**∅ - System-Außendurchmesser**
**(gilt für einwandige und doppelwandige Systeme)**

| **Ø** | **60** | **65** | **80** | **95** | **100** | **110** | **115** | **120** | **125** | **130** | **140** | **145** | **150** | **160** | **165** | **170** | **175** | **180** | **185** | **190** | **195** | **200** |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **ØB** | 60 | 65 | 80 | 95 | 100 | 110 | 115 | 120 | 125 | 130 | 140 | 145 | 150 | 160 | 165 | 170 | 175 | 180 | 185 | 190 | 195 | 200 |
| **ØC** | 115 | | 140 | | 165 | | | | 190 | | | | 215 | | | | 240 | | | | | 265 |
| **ØD** | 150 | | 175 | | 200 | | | | 225 | | | | 250 | | | | 275 | | | | | 300 |
| **E** | 597 | | 630 | | 663 | | | | 695 | | | | 728 | | | | 761 | | | | | 793 |
| **F** | 550 | | 575 | | 600 | | | | 625 | | | | 650 | | | | 675 | | | | | 700 |
| **kg** | 2,2 | | 2,4 | | 2,8 | | | | 3,1 | | | | 3,4 | | | | 3,7 | | | | | 4 |
| **Ø** | **205** | **210** | **215** | **220** | **225** | **230** | **235** | **240** | **245** | **250** | **255** | **260** | **265** | **275** | **280** | **285** | **290** | **295** | **300** | **315** | **320** | **325** |
| **ØB** | 205 | 210 | 215 | 220 | 225 | 230 | 235 | 240 | 245 | 250 | 255 | 260 | 265 | 275 | 280 | 285 | 290 | 295 | 300 | 315 | 320 | 325 |
| **ØC** | 265 | | | | 290 | | | | | 315 | | | | 340 | | | | | 365 | | | 390 |
| **ØD** | 300 | | | | 325 | | | | | 350 | | | | 375 | | | | | 400 | | | 425 |
| **E** | 793 | | | | 826 | | | | | 859 | | | | 891 | | | | | 924 | | | 957 |
| **F** | 700 | | | | 725 | | | | | 750 | | | | 775 | | | | | 800 | | | 825 |
| **kg** | 4 | | | | 4,4 | | | | | 4,7 | | | | 5,1 | | | | | 5,4 | | | 5,8 |
| **Ø** | **345** | **350** | **360** | **365** | **400** | **415** | **450** | **465** | **480** | **500** | **515** | **550** | **560** | **565** | **600** | **615** | **635** | **650** | **665** | **700** | **715** | |
| **ØB** | 345 | 350 | 360 | 365 | 400 | 415 | 450 | 465 | 480 | 500 | 515 | 550 | 560 | 565 | 600 | 615 | 635 | 650 | 665 | 700 | 715 | |
| **ØC** | 390 | 415 | | | 465 | | 515 | | 540 | 565 | | 615 | | | 665 | | 690 | 715 | | 765 | | |
| **ØD** | 425 | 450 | | | 500 | | 550 | | 575 | 600 | | 650 | | | 700 | | 725 | 750 | | 800 | | |
| **E** | 957 | 989 | | | 1055 | | 1120 | | 1152 | 1185 | | 1250 | | | 1316 | | 1348 | 1381 | | 1446 | | |
| **F** | 825 | 850 | | | 900 | | 950 | | 975 | 1000 | | 1050 | | | 1100 | | 1125 | 1150 | | 1200 | | |
| **kg** | 5,8 | 6,2 | | | 7 | | 7,8 | | 8,2 | 8,7 | | 9,5 | | | 10,5 | | 11 | 11,4 | | 12,5 | | |

notes:

DIN ISO 13920 Tolerances B

revisions-no. A | mm / kg

| | date | name |
|---|---|---|
| drawn by | 04.03.2021 | TRA |
| checked by | | |
| approved by | | |
| modified by | | |

jeremias® CHIMNEY SYSTEMS

description: Dachdurchführung 36-45° mit Wetterkragen

code: **WGR-ZUAC83∅**

drawing-no.: **01-07-04-5307-000**

scale: 1:10

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.