


Possible type of male part "FERRO"

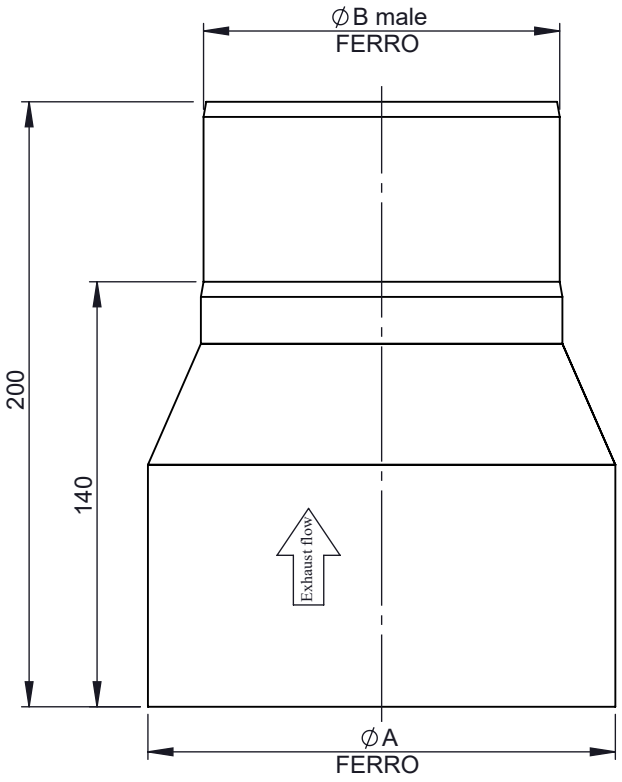

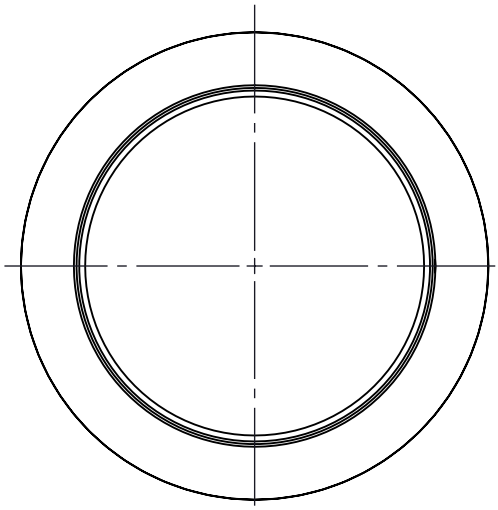

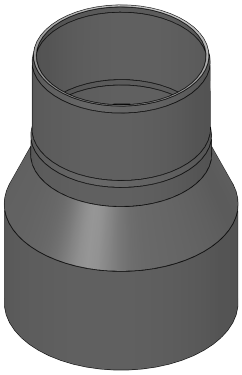

∅	120/100	120/110	130/100	130/110	130/115	130/120	130/125	140/120	140/130	150/100	150/110	150/115	150/120	150/125	150/130	150/140	160/120	160/130
A	120		130					140		150							160	
B	100	110	100	125	115	120	125	120	130	100	100	115	120	125	130	140	120	130
kg	2,51	2,51	2,56	2,66	2,62	2,65	2,66	2,71	2,75	2,69	2,69	2,74	2,77	2,78	2,8	2,84	2,83	2,86

160/140	160/150	180/120	180/130	180/140	180/150	180/160	200/120	200/130	200/150	200/160	200/180	220/180	225/200	250/130	250/150	250/180	250/200	300/250
160		180					200						225	250				300
140	150	120	130	140	150	160	120	130	150	160	180	180	200	130	150	180	200	250
2,9	2,94	2,97	2,99	3,02	3,06	3,09	3,12	3,14	3,2	3,23	3,29	3,25	3,35	3,59	3,62	3,67	3,71	4,22

notes:
ENCD

DIN ISO 13920 Tolerances B

revisions-no. 02

mm / kg

	date	name
drawn by	20.12.24	PMA
checked by	20.12.24	JAD
approved by	20.12.24	BBR
modified by	29.04.25	PMA

jeremias® CHIMNEY SYSTEMS

description: Reduction

code: **FERRO-RX∅A∅B**

drawing-no.: **06-01-3350-000**

scale: 1:5

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.