

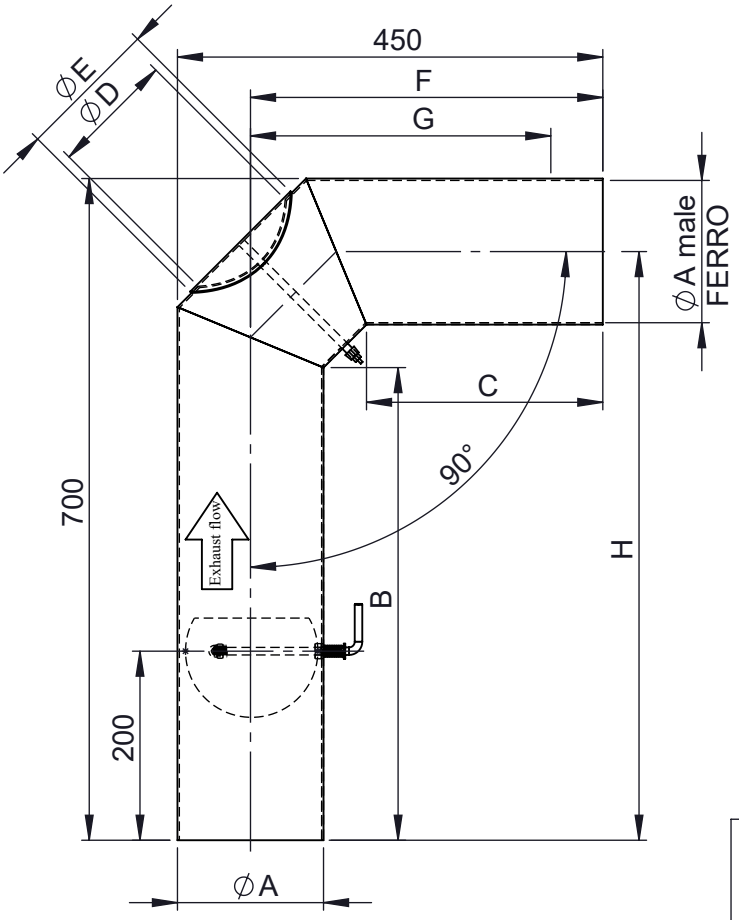


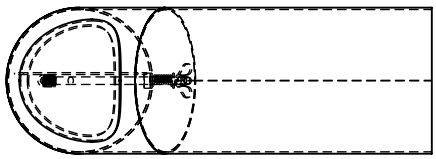

1:10 (Ø150)

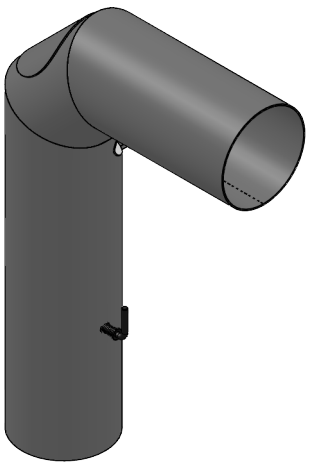

Attention [Uwaga]
Ferro x...

- 0 - not painted [element niemalowany]
- 1 - SENOTHERM 702.284 black [czarny]
- 2 - SENOTHERM 702.310 black-metalic [czarny metalik]
- 3 - SENOTHERM 702.288 gray [szary]
- 4 - SENOTHERM 800.820 light-gray [jasno szary]

Ø	115	120	125	130	150	160	180	200	250
A	115	120	125	130	150	160	180	200	250
B	535	530	525	520	500	490	470	450	400
C	285	280	275	270	250	240	220	200	150
D	100			130		150			180
E	120			150		170			200
F	390	387	386	383	373	368	358	348	323
G	335	332	331	328	318	313	303	293	268
H	640	637	635	633	623	618	608	598	573
kg	6,0	6,2	6,4	6,6	7,5	7,9	8,7	9,4	11,1

notes:
ENCD

DIN ISO 13920 Tolerances B

revisions-no. 01 | mm / kg

	date	name
drawn by	12.02.24	KOS
checked by	12.02.24	JAD
approved by	12.02.24	JWY
modified by		

jeremias® CHIMNEY SYSTEMS

description: Elbow with inspection opening + door and damper Length

code: **FERRO X415**

drawing-no.: **06-01-6579-000**

scale: 1:8

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.