


Possible type of female part "FU"

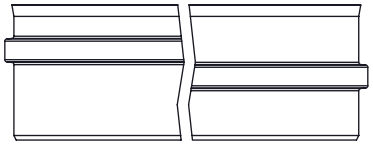

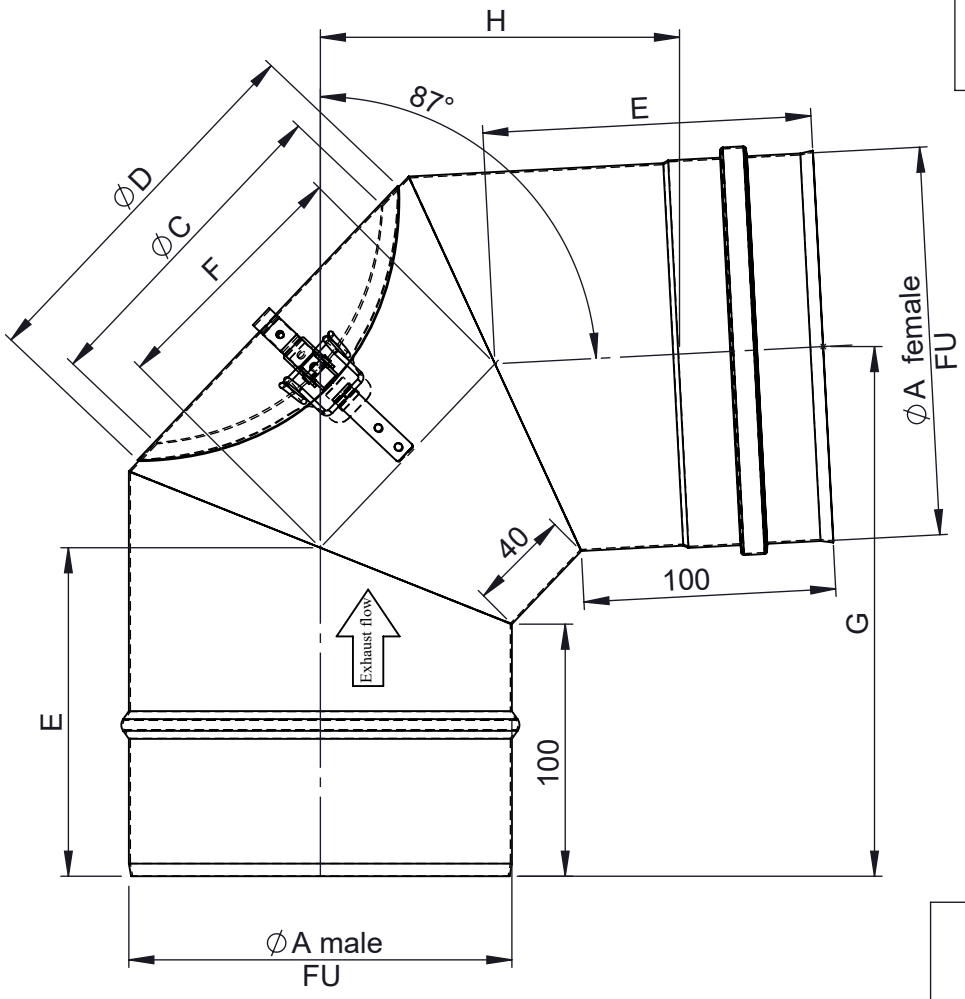

M 1:6 (Ø150)

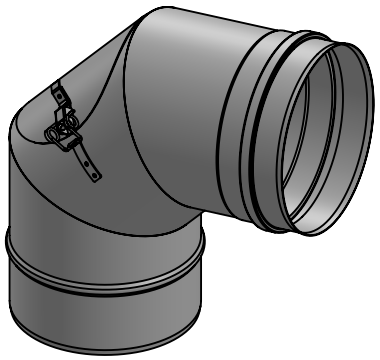

Ø	060	080	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	60	80	100	110	115	120	125	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
C	60	80	100							130		150		180			200	250				
D	70	90	110	120						150		170		200			220	270				
E	112	116	120	122	123	124	125	126	128	130	132	136	140	145	150	160	170	180	190	200	210	220
F	64	72	80	84	86	88	90	92	96	101	104	112	120	130	140	160	180	200	220	240	260	280
G	161	172	182	187	189	192	194	197	202	207	212	222	232	244	257	282	307	332	356	381	406	431
H	99	109	118	123	125	128	130	133	137	142	147	156	166	178	189	213	237	261	284	308	332	355
kg	0,3	0,42	0,54	0,61	0,76	0,68	0,71	0,89	0,99	0,9	0,97	1,14	1,31	1,54	1,78	2,31	3,87	4,75	5,71	6,76	10,53	9,09

notes:

DIN ISO 13920 Tolerances B

revisions-no. 00

	date	name
drawn by	27.02.2026	RMU
checked by	27.02.2026	PMA
approved by	27.02.2026	BBR
modified by	27.02.2026	RMU

jeremias® CHIMNEY SYSTEMS

description: elbow 87° with inspection opening (up to 600°C/N1), round door (roller-seam (resistance) welding)

code: **FU 23N ∅**

drawing-no.: **01-20-6508-000**

scale: 1:3

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.