




Ausführungsvarianten für Muffe Innenrohr

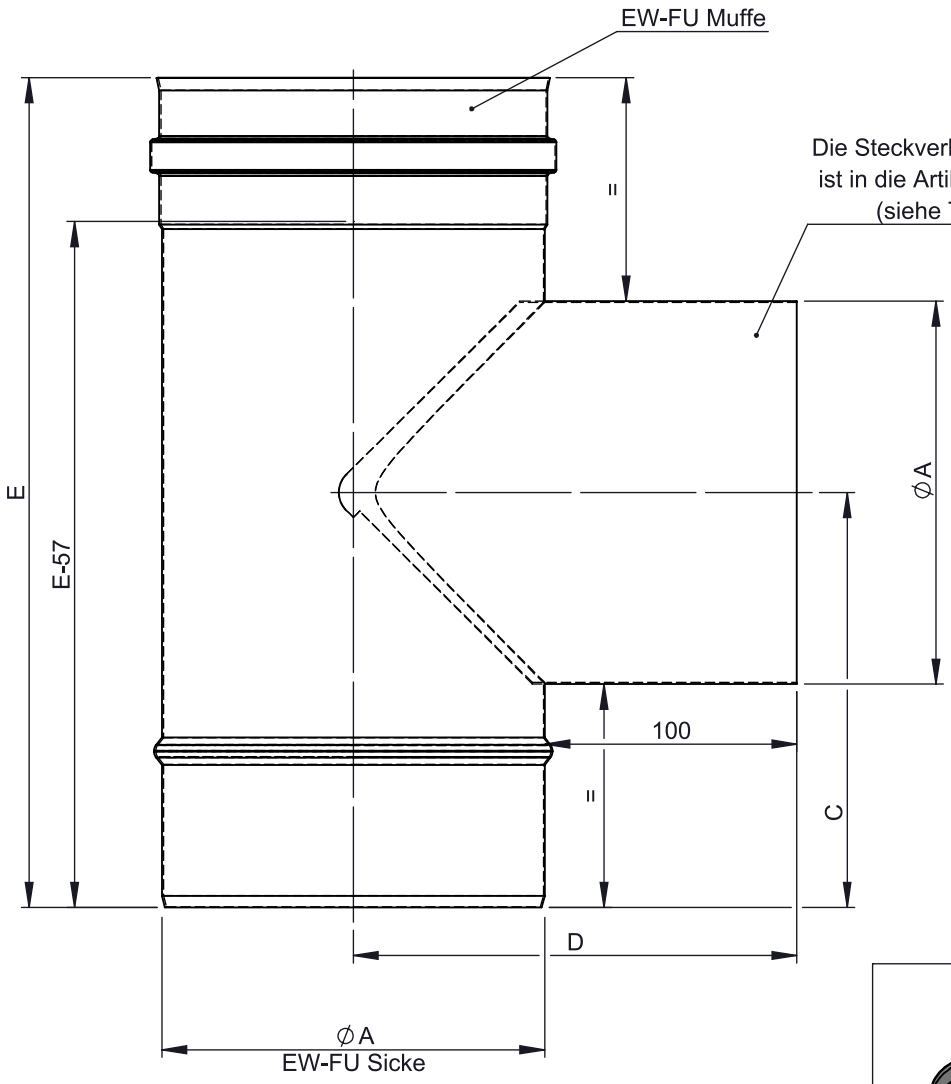




M1:8 (Ø150)



| Code | FU 3317Ø | FU 3317MØ | FU 3317SØ |
|---|---|---|---|
| Variante |  Glatt / Bez końcówki / Without end |  M = Muffe / Mufa / Female EW-FU |  S = Sicke / Zyka / Male EW-FU |

| Ø | 060 | 080 | 090 | 100 | 110 | 115 | 120 | 125 | 130 | 140 | 150 | 160 | 180 | 200 | 225 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| A | 60 | 80 | 90 | 100 | 110 | 115 | 120 | 125 | 130 | 140 | 150 | 160 | 180 | 200 | 225 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 |
| C | 138 | | | 165 | | | | | | | | 188 | | | 223 | | 248 | 298 | | 325 | 350 | 375 | 400 |
| D | 130 | 141 | 146 | 151 | 156 | 158 | 161 | 163 | 166 | 171 | 176 | 181 | 191 | 201 | 213 | 226 | 251 | 275 | 300 | 325 | 350 | 375 | 400 |
| E | 276 | | | 329 | | | | | | | | 376 | | | 446 | | 496 | 596 | | 650 | 700 | 750 | 800 |
| kg | 0,4 | 0,5 | 0,6 | 0,7 | 0,7 | 0,8 | 0,8 | 0,8 | 0,8 | 0,9 | 1 | 1,1 | 1,3 | 1,6 | 1,8 | 2,2 | 3 | 4,4 | 4,9 | 6 | 7 | 8,2 | 9,4 |

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1 | mm / kg

| | date | name |
|---|---|---|
| drawn by | 22.03.2021 | KSA |
| checked by | | |
| approved by | | |
| modified by | 11.10.2022 | OPA |

jeremias CHIMNEY SYSTEMS

description: T-Anschluss 90° mit Wassernase (WIG-geschweißt)

code: FU063317Ø / FU063317MØ / FU063317SØ

drawing-no.: 01-01-20-2200-000

scale: 1:3

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.