



A (1 : 1)

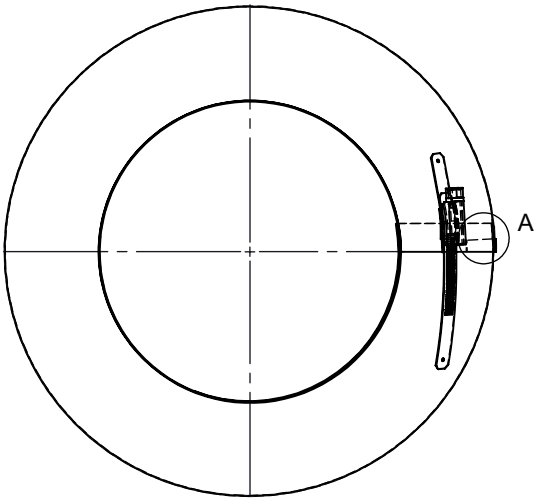

M 1:5 (Ø150)

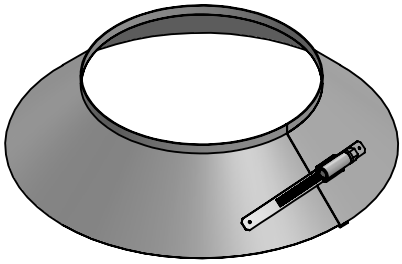

Ø	60	65	80	95	100	110	115	120	125	130	140	145	150	160	165	170	175	180	185	190	195	200	205	210	215	220	225	230	235
B	68	74	89	104	109	119	124	129	134	139	149	154	160	169	174	179	184	189	194	199	204	209	214	219	224	229	234	239	244
kg	0,3			0,4						0,5					0,6											0,7			

Ø	240	245	250	255	260	265	275	280	285	290	295	300	315	320	325	345	350	360	365	400	415	450	465	480	500	515	550	560	565
B	249	254	259	264	269	274	284	292	294	299	304	309	324	329	334	354	359	369	374	409	424	459	474	489	509	524	559	569	574
kg	0,7			0,8								0,9				1,0				1,1		1,2		1,3		1,4		1,5	

Ø	600	615	635	650	665	700	715	750	765	800	815	850	865	900	915	950	965	1000	1015	1050	1065	1100	1115	1150	1165	1200
B	609	624	644	659	674	709	724	759	774	809	824	859	874	909	924	959	974	1009	1024	1059	1074	1109	1124	1159	1174	1209
kg	1,6			1,7		1,9				2,0		2,1	2,2		2,3		2,4	2,5		2,6		2,7	2,8		2,9	

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1 | mm / kg

	date	name
drawn by	04.06.2020	KSA
checked by		
approved by		
modified by		

jeremias CHIMNEY SYSTEMS

description: Wetterkragen mit Rand

code: **ZUAC307**

drawing-no.: **01-07-04-5451-000**

scale: 1:4

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.