
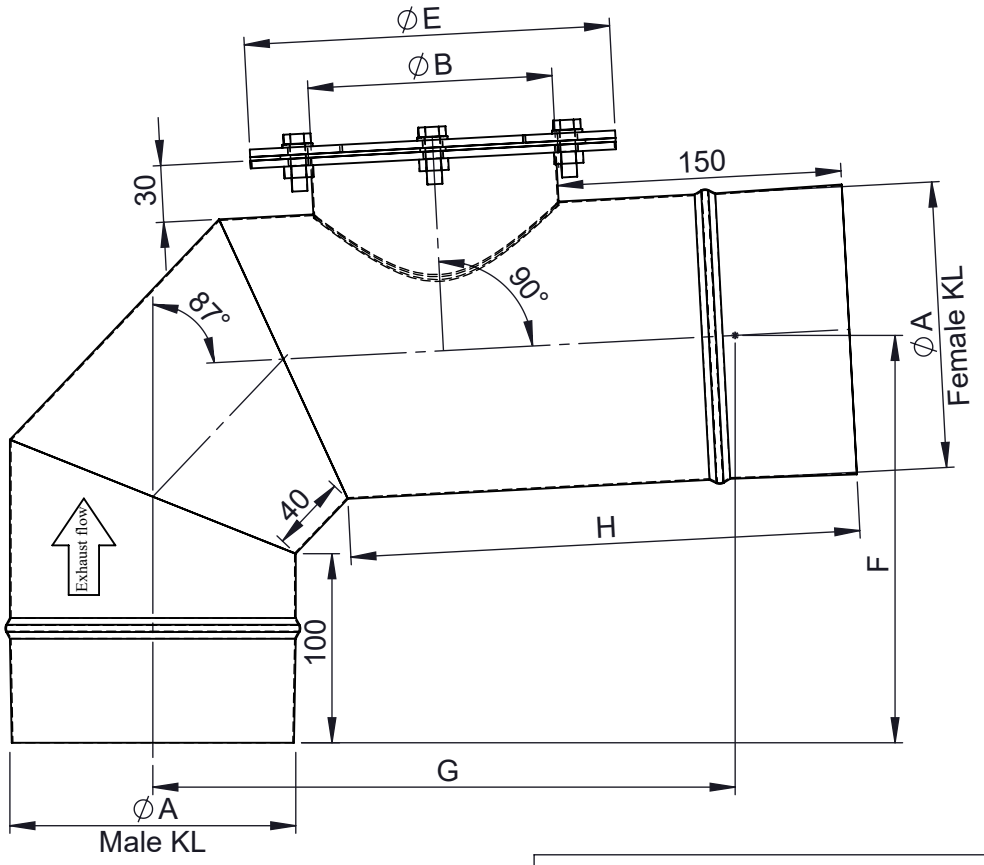


150 (1:6)

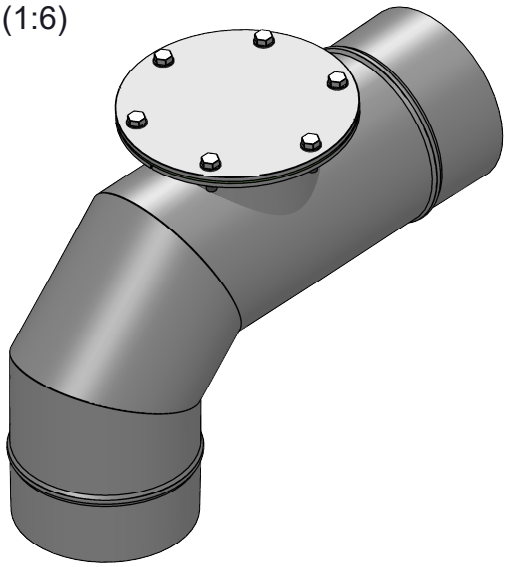

∅	080	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
A	80	100	110	115	120	130	140	150	160	180	200	225	250	300	350	400	450	500	550	600
B	80	100				130			150			180			200	250				
E	144	164				194			214			244			264	314				
F	179	190	195	197	199	206	210	216	221	231	240	254	266	290	314	341	365	389	413	437
G	259	280	280	281	281	312	313	313	335	337	338	370	371	375	399	452	456	460	464	467
H	248	260	256	254	252	278	274	270	287	279	271	291	281	261	261	291	270	251	231	211
kg	1,55	1,95	2,02	2,06	2,1	2,61	2,7	2,79	3,21	3,41	3,59	4,38	4,64	5,2	7,38	9,46	10,41	11,36	12,37	13,41

notes:
ENCD

DIN ISO 13920 Tolerances B

revisions-no. 02 | mm / kg

	date	name
drawn by	31.05.23	PMA
checked by	31.05.23	JAD
approved by	31.05.23	JWY
modified by		

jeremias® CHIMNEY SYSTEMS

description: Elbow 87° with inspection opening (251-600°C/H1), round door

code: **KL1317HTW∅**

drawing-no.: **01-10-6504-000**

scale: 1:10

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.