



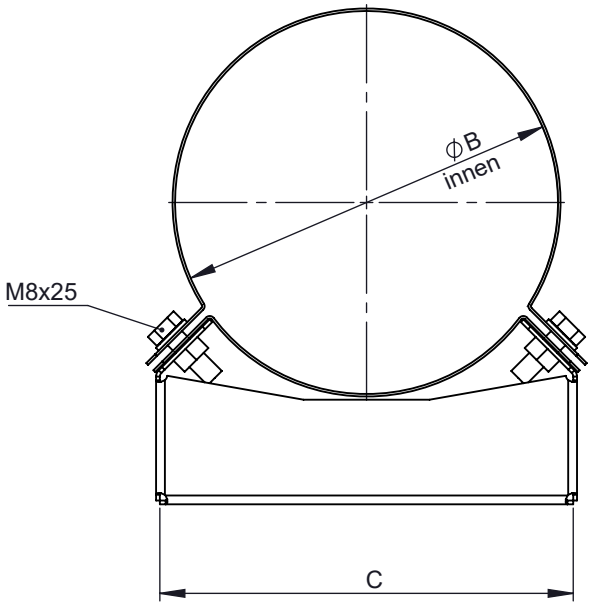

M 1:5 (Ø150)



Ø	060	080	090	100	110	115	120	125	130	140	145	150	160	165	170	175	180	185	190	195	200
B	60	81	91	101	111	116	121	126	131	141	146	152	161	166	171	176	181	186	191	196	201
C	100	114									164								195		
D	35										50										
E	50	60									100								120		
kg	0,22	0,3	0,3	0,32	0,32	0,33		0,34		0,35	0,54		0,56		0,57		0,58	0,59	0,65	0,66	

Ø	205	210	215	220	225	230	235	240	245	250	255	260	265	275	280	285	290	295	300
B	206	211	216	221	226	231	236	241	246	251	256	261	266	276	284	286	291	296	301
C	195		210						225				255						
D	50																		
E	120		135						150				180						
kg	0,67		0,7	0,71		0,72		0,73	0,76		0,77		0,85	0,86	0,87		0,88	0,89	

Ø	315	320	325	345	350	360	365	400	415	450	465	480	500	515	550	560	565	600	615	635	650	665
B	316	321	326	346	351	361	366	401	416	451	466	481	501	516	551	561	566	601	616	636	651	666
C	295					328				417					480							635
D	50																					
E	215					250				339					380							535
kg	0,97		0,98	1,0	1,01	1,09		1,13	1,15	1,38	1,39	1,41	1,44	1,46	1,64	1,65	1,66	1,7	1,72	1,75	1,76	2,23

notes:

DIN ISO 13920 Tolerances B

revisions-no. A1

mm / kg

	date	name
drawn by	22.04.2021	AKO
checked by	22.04.2021	SWA
approved by	22.04.2021	JWY
modified by		

jeremias® CHIMNEY SYSTEMS

description: Wall bracket rigid, wall distance 50mm

code: **WGR-ZUAC21**

drawing-no.: **01-07-04-0200-000**

scale: 1:3

format: A4

sheet: 1 of 1

© jeremias GmbH. All rights reserved, also regarding any disposal, exploitation, editing, distribution, as well as in the event of applications for industrial property rights.