

DESCRIPTION

The Jeremias EW-SILVER system is suitable for cross-sectional reductions in chimneys to adapt to modern fireplaces (oil/gas/chip/split logs and wood pellets according to DIN 51731, for dry and condensing operation mode)

MATERIAL

1.4539 (904L) only for components in contact with flue gas

FINISHING

Matt

WALL THICKNESS

0.6 mm

Others on request

INSIDE DIAMETER

80 - 300 mm

Others on request

INSULATION

Insulating shells available as an option

CONNECTION


Socket / bead

ORDER CODE

The article code for your order results from:

Article code + Ø (Ex: 617-FU0602130).

Please refer to the respective code for deviations.

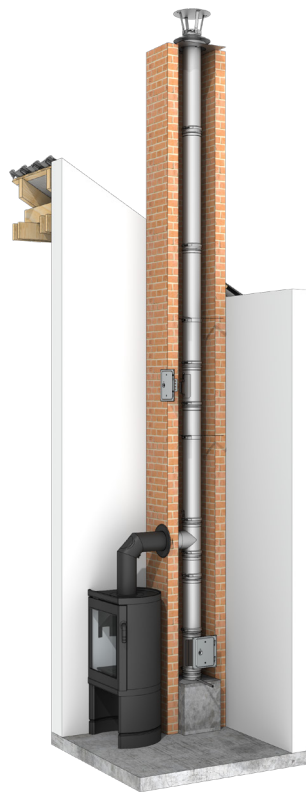

CHARACTERISTICS

- Resistant to soot fire or moisture
- Lightweight material for fast assembly and simple offset
- Optional fixation with locking bands
- Optionally available as an oval tube, ideal for narrow and multiple chimneys
- Large variety of systems and extensive range of accessories

APPLICATION AREAS

- Standard heating appliances for oil and gas
- Natural wood pellets, chips and logs made from natural wood

APPROVAL NUMBER

Z - 7.1 - 3374

CLASSIFICATIONS TO DIN V 18160 - 1

T400 - N1 - W2¹⁾ - G50 - L00

T600 - N1 - W2¹⁾ - G100 - L00

¹⁾ for wood pellets made from natural wood
for wood chips made from natural wood
for natural firewood
for gas and fuel oil EL